

KLED

D-200 Serious

/ 25W-240W /

Urban lighting

A Classic Residential Lighting
with Mediterranean style




D-200 Series



D-200M
75-150W

D-200S
25-60W


D-200L
150-240W

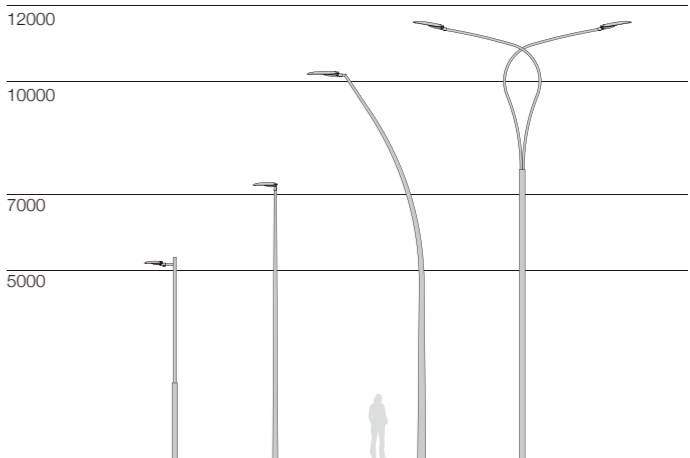




快捷拆卸式换灯结构，当灯具需要维修时，无需特殊工具，便可方便更换灯体部分

When the lighting needs to be repaired, the body can be easily replaced without special tools.

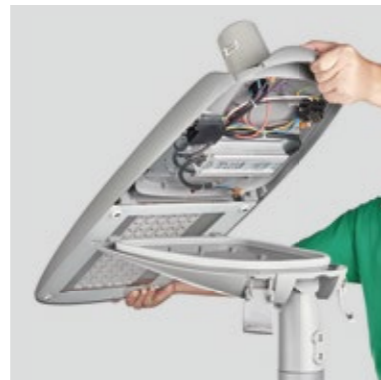


当灯具失效需要维修时，只需要拆卸更改灯体进行更换就可以，无需任何工具

When the lighting fails and needs to be repaired, it is only necessary to remove the body for replacement without any tools.

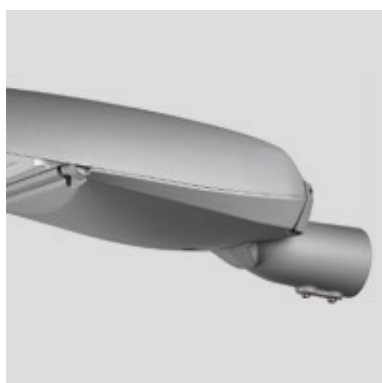


灯具具有横装、竖装二种方式，角度可以-15~+10度调节

Top or side fitting Ø60mm, Ø76 arm be option, from -15° ~ +10° angle adjustable.

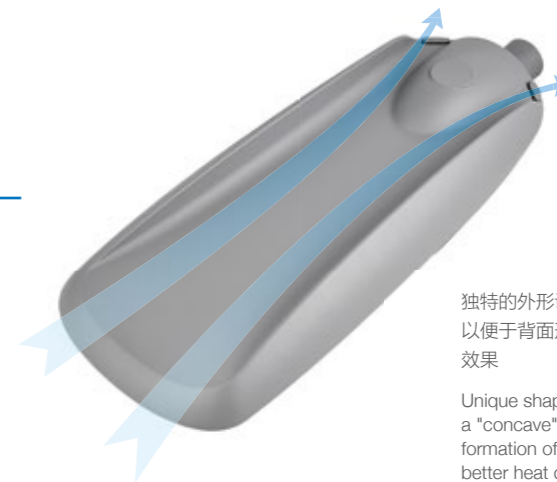

独特的外形设计，背部设计成“凹”型结构，以便于背面形成“风道”效应，能更好的散热效果

Unique shape design, the back is designed as a "concave" structure, to facilitate the formation of the back "air duct" effect, can better heat dissipation effect.

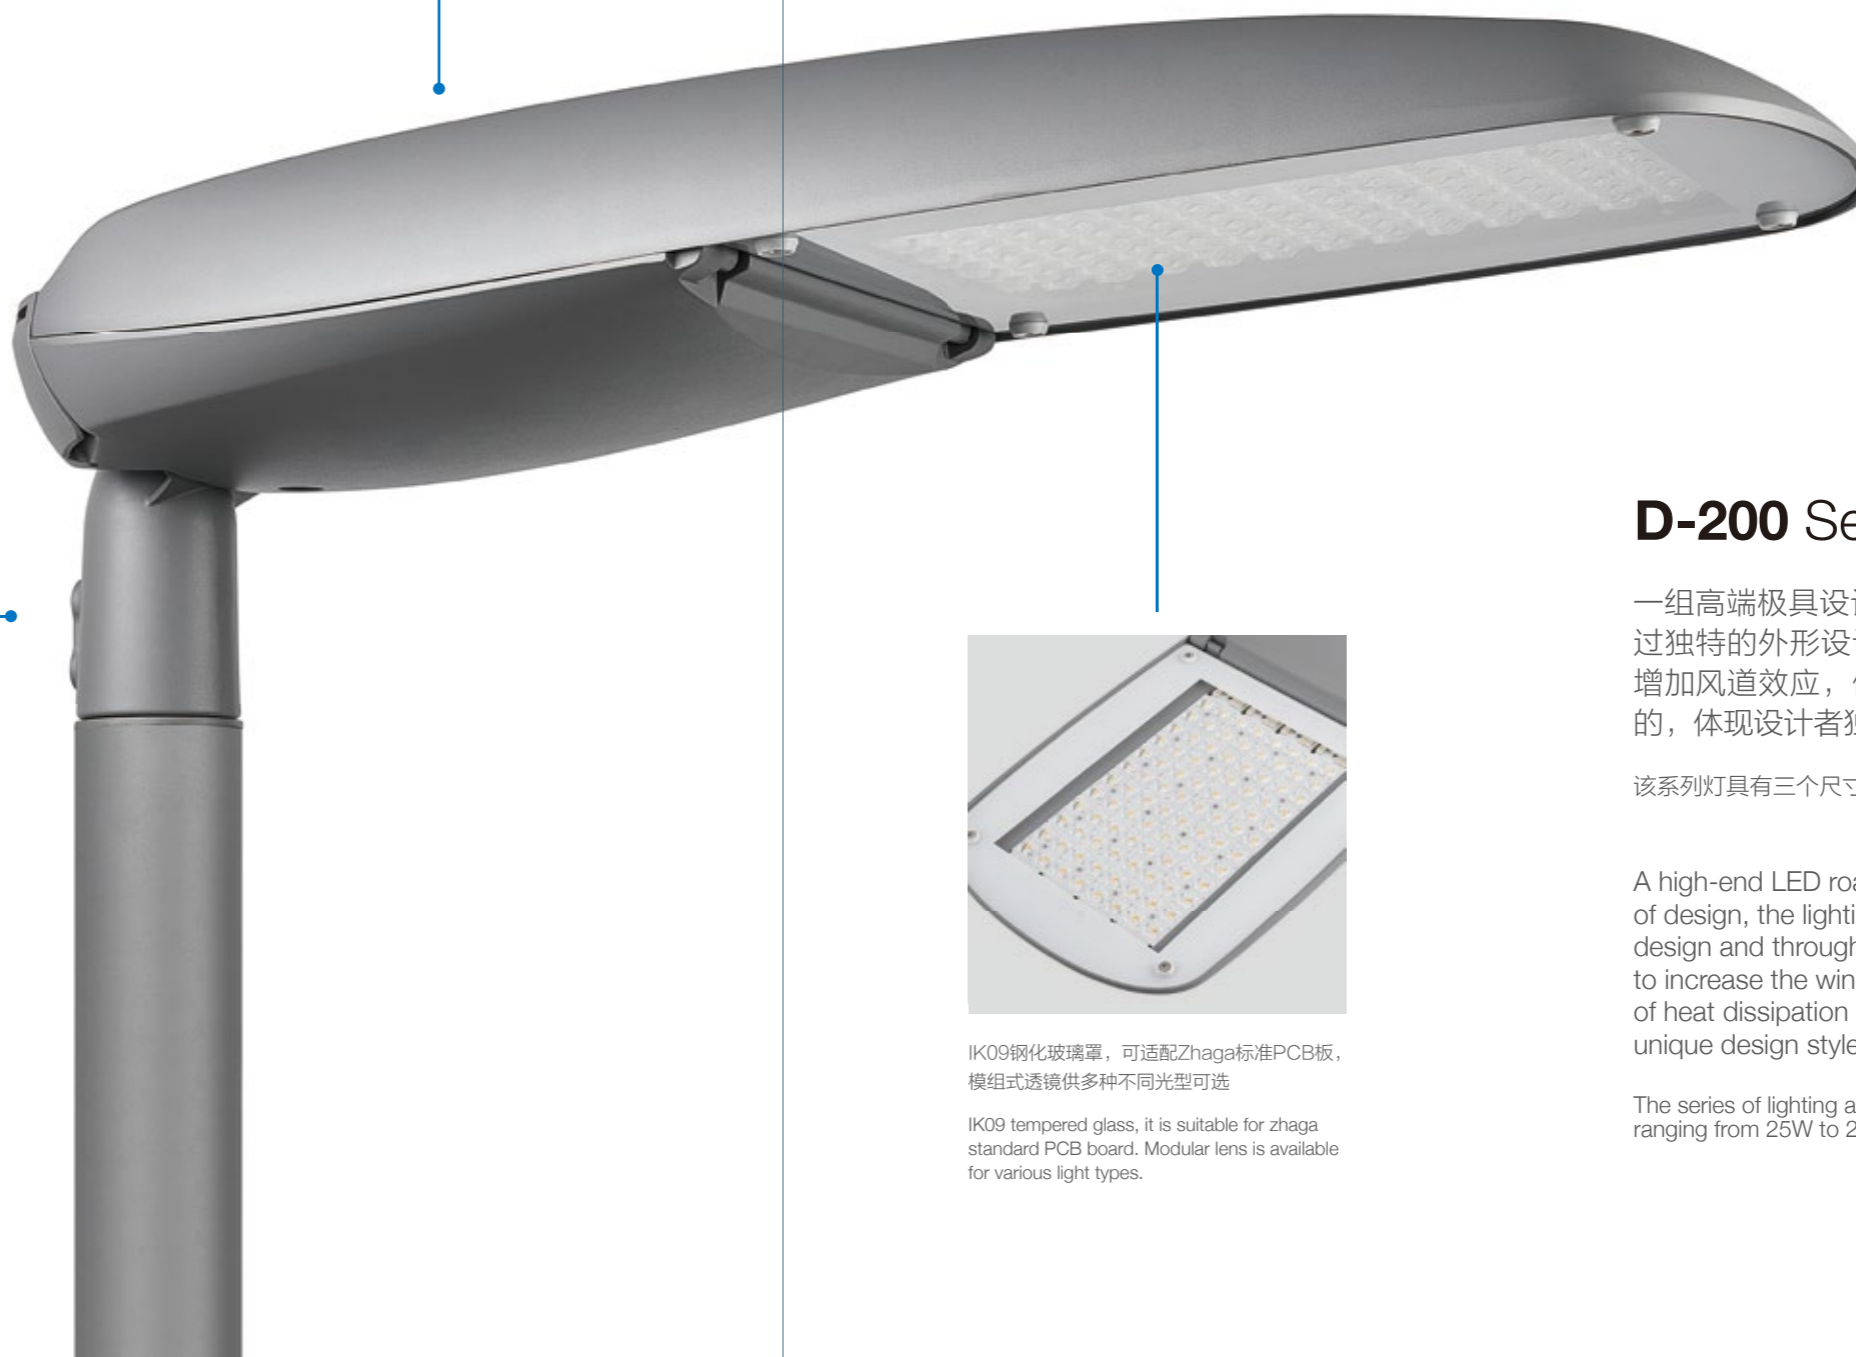

3 SIZES

LED

D-200 Series

一组高端极具设计感的LED道路灯，该灯具通过独特的外形设计，通过灯具背部设计凹型来增加风道效应，使结构最后达到快速散热的目的，体现设计者独具匠心的设计风格。

该系列灯具具有三个尺寸版本供应用选择，功率从25W-240W

A high-end LED road lighting, it with a strong sense of design, the lighting through the unique shape design and through the body back design concave to increase the wind effect, to achieve the purpose of heat dissipation structure. Reflect the designer's unique design style.

The series of lighting are available in three sizes, with power ranging from 25W to 240W.



IK09钢化玻璃罩，可适配Zhaga标准PCB板，模组式透镜供多种不同光型可选

IK09 tempered glass, it is suitable for zhaga standard PCB board. Modular lens is available for various light types.


简述 Description






- 铝压铸灯体外壳，超白钢化玻璃，特殊外形设计，有3种尺寸供选择
- 高透光PC透镜，具有高视觉舒适性和均匀配光透镜，供多种不同配光选择
- 高性能LED芯片，驱动有0-10V / DALI / 编程电源选择，20KV浪涌保护器
- 铝压铸扣攀开启方式，内设有开启断电保护器，灯体可以整体脱卸，维修更换方便
- 有侧装和顶装2种安装方式，角度可调，安装管径有 $\varnothing 48 / \varnothing 60 / \varnothing 76$ mm
- 防紫外线聚氨酯粉喷涂表面，盐雾测试可以达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 道路灯智能远程控制系统可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质

- Die-casting aluminium body, super white tempered glass. Special shape design, it has 3 sizes version options.
- Optics with PC lens with high visual comfortable and uniform lighting distribution, multiple light distribution options.
- High quality LED chips, Driver with 0-10V/DALI/programmed be options, and with surge protection up to 20KV.
- Tool-free replaceable, die-casting fasten for opened device, automatic on/off connector when be open, The body can be detached and replaced easily.
- Top and side fixing, angle can be adjustable, installation tube diameter $\varnothing 48/\varnothing 60/\varnothing 76$ mm.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.

应用透镜 Optics application

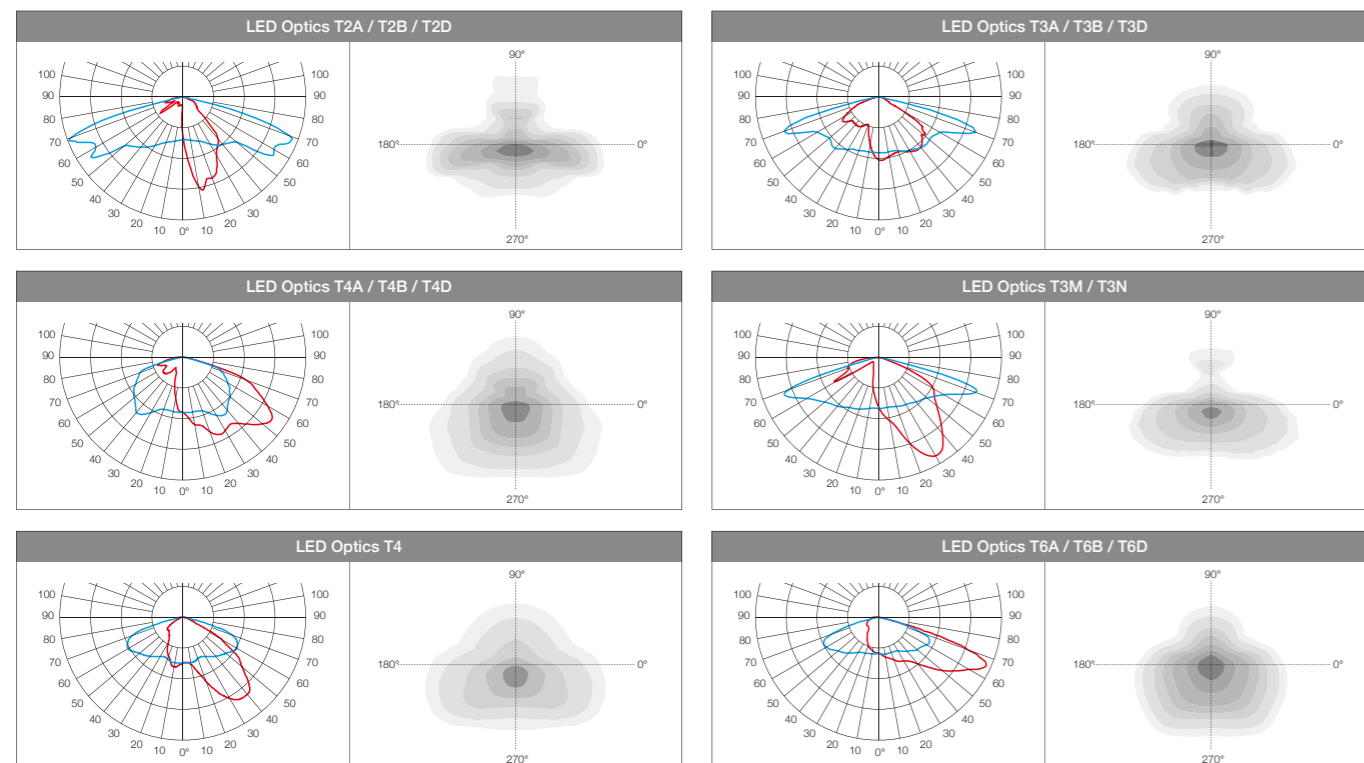

技术参数 Technology data



D-200L

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-200LLED150-64	150W	64	T3A/T4A/T5A/T4	950*405*180	13.7	408	840
D-200LLED200-72	200W	72	T3A/T4A/T5A/T4	950*405*180	13.7	408	840
D-200LLED240-96	240W	96	T3A/T4A/T5A/T4	950*405*180	13.7	408	840

LED chips - 3030

D-200LLED200-224	200W	224	T2B/T3B/T4B	950*405*180	13.7	408	840
D-200LLED240-252	240W	252	T2B/T3B/T4B	950*405*180	13.7	408	840

D-200M

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-200MLED75-32	75W	32	T2A/T3A/T4A/T3M/T4	735*340*165	8.0	624	1326
D-200MLED100-48	100W	48	T2A/T3A/T4A/T3M/T4	735*340*165	8.0	624	1326
D-200MLED120-48	120W	48	T2A/T3A/T4A/T3M/T4	735*340*165	8.0	624	1326
D-200MLED150-48	150W	48	T2A/T3A/T4A/T3M/T4	735*340*165	8.0	624	1326

LED chips - 3030

D-200MLED75-112	75W	112	T2B/T3B/T4B	735*340*165	8.0	624	1326
D-200MLED100-168	100W	168	T2B/T3B/T4B	735*340*165	8.0	624	1326
D-200MLED120-168	120W	168	T2B/T3B/T4B	735*340*165	8.0	624	1326
D-200MLED150-168	150W	168	T2B/T3B/T4B	735*340*165	8.0	624	1326

D-200S

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-200SLED25-8	25W	8	T2A/T3A/T3M	565*230*150	6.8	1400	2912
D-200SLED40-16	40W	16	T2A/T3A/T3M	565*230*150	6.9	1400	2912
D-200SLED60-24	60W	24	T2D/T3D/T3N	565*230*150	6.9	1400	2912

LED chips - 3030

D-200SLED25-28	25W	28	T2B/T3B/T4B	565*230*150	6.8	1400	2912
D-200SLED50-56	50W	56	T2B/T3B/T4B	565*230*150	6.9	1400	2912

可选配件 Accessories options

	Code
$\varnothing 76$ 安装座 Fixing Arm	210001086
$\varnothing 60$ 安装座 Fixing Arm	210000255
$\varnothing 60-48$ 转换套 Adapter Arm / Adapter required for install on the pole.	210002547



— King-Bridge Lighting —



宁波金羽桥照明科技有限公司

NING KING-BRIDGE LIGHTING TECHNOLOGY CO.,LTD.

地址：浙江省余姚市阳明街道新桥工业区

Add: Xinqiao Industry Zone, Yangming Street, Yuyao City, Zhejiang Province, China

Tel: +86-574-6256 6890

Fax: +86-574-6256 6827

info@kled.com

国内营销中心：金羽桥照明科技（上海）有限公司

地址：上海市长宁区中山西路179号4K室

电话：189 1897 7928