

The photograph may not match the reference exactly. Please read the product description to identify the finish.

TECHNICAL CHARACTERISTICS



Product Model:	TG-162LED100-48	TG-162LED120-48	TG-162LED150-60	TG-162LED180-60
IP Protection degrees:	IP66	IP66	IP66	IP66
IK Protection degrees:	IK09	IK09	IK09	IK09
Light source:	48 x LED CREE / 48 x LUXEON 5050		60 x LED CREE / 60 x LUXEON 5050	
Total power consumption:	100W	120W	150W	180W
Luminous Flux	10200-12000Lm	12000-14400Lm	15300-18000Lm	18000-21600Lm
Luminous efficiency:	102-120Lm/w			
Color temperature:	4000K as standard. Optinal 2700K,3000K & 5700K. Amber LED available			
Voltage/Frequency:	100-240V/50-60Hz			
Warranty(Years):	5			
Units per box:	1			
Net Weight(Kg)	9.1	9.2	9.3	9.4

MATERIALS / FINISHES

Structure material: High purity aluminium	aiffuser material: Glass
Structure finish: Black	Diffuser finish: Transparent


GEAR

Multi-voltage electronic gear included (100-240 V / 50-60 Hz)

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

Kled reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product. Please consult the sales team to clarify any doubt.

Tel.: +86 574 62566 890
Email: info@kled.com.cn
http://www.kled.com.cn/

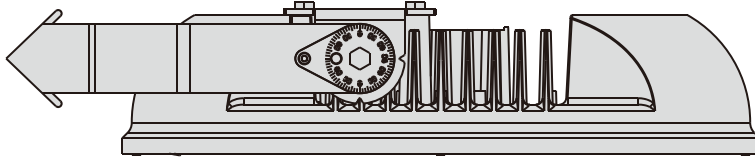

High purity aluminum

Ultra-white glass

installation template