



## L-02 Series



单色白光  
Monochromatic White: DMX




RGB变色  
RGB: DMX



RGBW变色  
RGBW: DMX

### 简述 Description



- 挤出铝型材灯体，铝压铸端盖配高温硅胶密封条
- 超白丝印钢化玻璃，具有高视觉舒适性和均匀配光
- 防紫外线聚氨酯塑粉喷涂表面，耐腐蚀可以达1000小时以上
- 可在地板、墙壁和天花板进行嵌入式安装
- 多种光学组件可选，适用于不同要求照明场合
- 灯具表面最高温度不超过50°C，安全可靠
- 所有外部螺钉均为304不锈钢材质
- 灯具符合EN60598-1技术标准要求

功率: 12W / 36W / 60W  
光效: 90-100 Lm/W (Ra80)  
色温: 2700K / 3000K / 4000K  
输入电压: AC 110V-277V  
功能选项: Switch / DMX

- Extruded aluminium body and flush end cover in die-casting complete with silicone gaskets.
- Super white tempered glass, with high visual comfort and uniform lighting distribution.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- Wall and ceiling mount as well as support with adjustable arms.
- Multiple optics be options, suitable for lighting requirements in different applications.
- The maximum surface temperature of all contact temperature <50°C for safety and reliable.
- All external screw are made of 304 stainless steel.
- The luminaire technical characteristics conform to EN 60598-1 standards.

Power: 12W / 36W / 60W  
Nominal efficacy: 90-100 Lm/W (Ra80)  
CCT: 2700K / 3000K / 4000K  
Input voltage: AC 110V-277V  
Options: Switch / DMX

- 应用场合: 广场、建筑物、雕塑、标志物、广告牌等景观照明场所
- Applications: For landscape lighting places such as square, buildings, sculptures, signs and billboards.



规格选项 Flexibility

此洗墙灯有三个主要尺寸规格，包括单色白光和彩色混光（RGB，RGBW），对于相同长度的灯具，可灵活选择不同光学配件，为每个照明设计方案提供优异的性能和最大的灵活性

This kind of linear is available in 3 main lengths with LED monochrome white and colour light, and each linear has some optics options for wall washing, it provide exceptional performance and maximum flexibility for every lighting design solution.



L=326mm / P=12W



L=950mm / P=36W





L=1470mm / P=60W

连接方式 Simplified wiring

每个灯具出线两端配有快速连接器，安装连接灯具非常快速方便，不用打开灯具接线，提升了操作安全性

Each linear with two cables complete with quick-coupling (male / femal) connector, so during these mounting operations, the luminaire is never opened, significantly reducing installation times and cost and at the same time increasing operator safety.

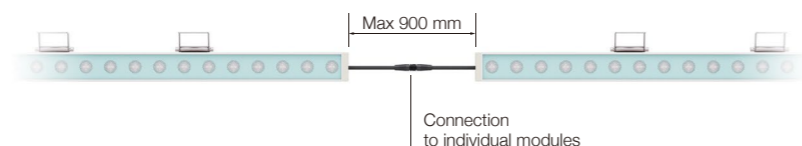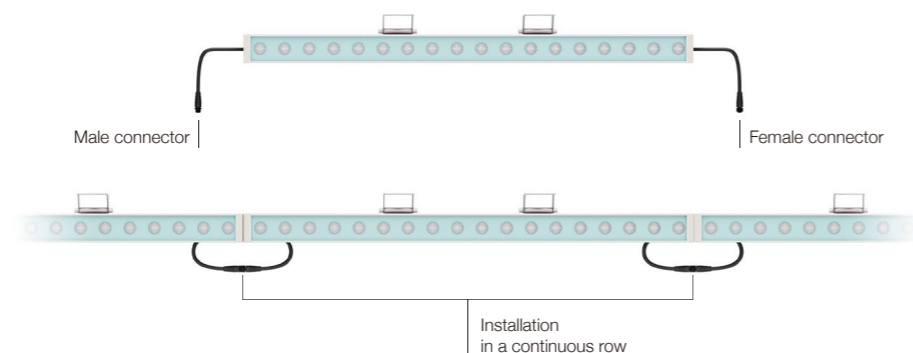


\* 单个灯具连接的距离超出允许的标准尺寸，需要单独订购连接件

\* When installing individual modules, the distance between them can be increased using special accessories (multicore cable and connectors).


安装应用 Applications

在多种的安装环境中有不同的安装方案以适应建筑照明需求


For different installation system in a broad variety of applications in every architectural context.



顶装  
Ceiling-mounted



可调节壁挂式  
Wall-mounted with adjustable arms




可调节壁挂式  
Wall-mounted with adjustable arms

发光角度 Optics




技术参数 Technology data

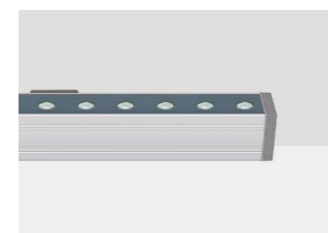


L-02XL

Code	Power	LED Qty	Control Options	Input Voltage	Optics	Packing Size	Weight
LED chips - 3535 L-02LED60-28L150	60W	28	Switch / DMX	110-277V	TL14	1535*235*255/4pcs	19
LED chips - RGBW L-02LED60-28RGBWL150	60W	28	DMX	110-277V	TL14	1535*235*255/4pcs	19.5

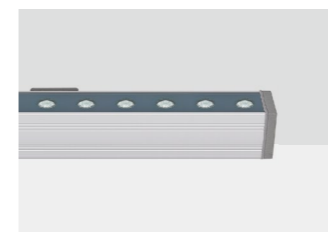


L-02L

Code	Power	LED Qty	Control Options	Input Voltage	Optics	Packing Size	Weight
LED chips - 3535 L-02LED36-18L100	36W	18	Switch / DMX	110-277V	TL14	1015*235*255/4pcs	14
LED chips - RGB L-02LED36-18RGBL100	36W	18	DMX	110-277V	TL14	1015*235*255/4pcs	14.5
LED chips - RGBW L-02LED36-18RGBWL100	36W	18	DMX	110-277V	TL14	1015*235*255/4pcs	14.5

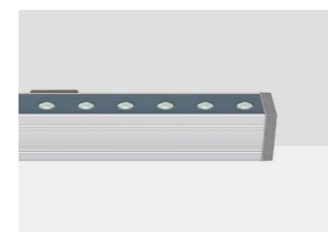

L-02S

Code	Power	LED Qty	Control Options	Input Voltage	Optics	Packing Size	Weight
LED chips - 3535 L-02LED12-6L32	12W	6	Switch / DMX	110-277V	TL14	375*220*260/4pcs	6.9
LED chips - RGB L-02LED12-6RGBL32	12W	6	DMX	110-277V	TL14	375*220*260/4pcs	7.3
LED chips - RGBW L-02LED12-6RGBWL32	12W	6	DMX	110-277V	TL14	375*220*260/4pcs	7.3

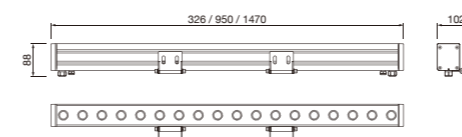

可选配件 Accessories options

	Code
安装支架 Bracket	210004913
快插接头公 Quick Male Connector	320000792
快插接头母 Quick Female Connector	320000793