




The photograph may not match the reference exactly. Please read the product description to identify the finish.

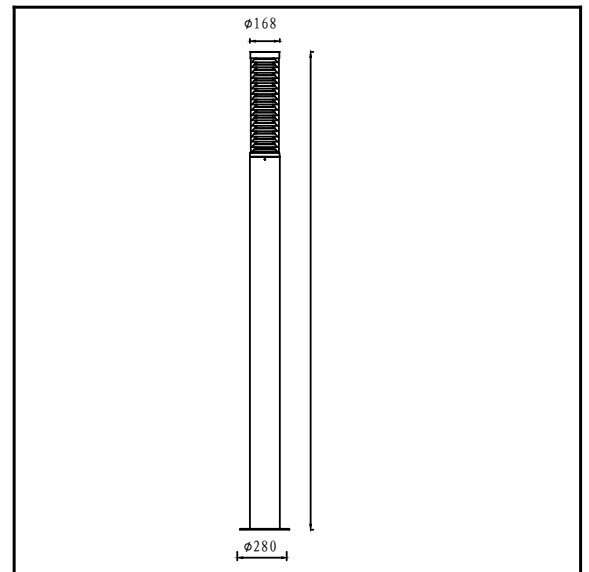

T-102LED

TECHNICAL CHARACTERISTICS



Product Model:	T-102LED60-576	T-102LED80-576
IP Protection degrees:	IP65	
IK Protection degrees:	IK08	
Light source:	576 x SMD 2835	
Total power consumption:	60W	80W
Luminous Flux	1800-2100Lm	2400-2800Lm
Luminous efficiency:	30-35Lm/w	
Color temperature:	4000K as standard. Optimal 2700K, 3000K & 5700K. Amber LED available	
Voltage/Frequency:	100-240V/50-60Hz	
Warranty(Years):	5	
Units per box	1	
Net Weight(Kg)	17.5	18.5

MATERIALS / FINISHES


Structure material: Galvanized iron	diffuser material: PMMA
Structure finish: Silver	Diffuser finish: Transparent

GEAR

Multi-voltage electronic gear included (220-240 V / 50-60 Hz)

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

Kled reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product. Please consult the sales team to clarify any doubt.

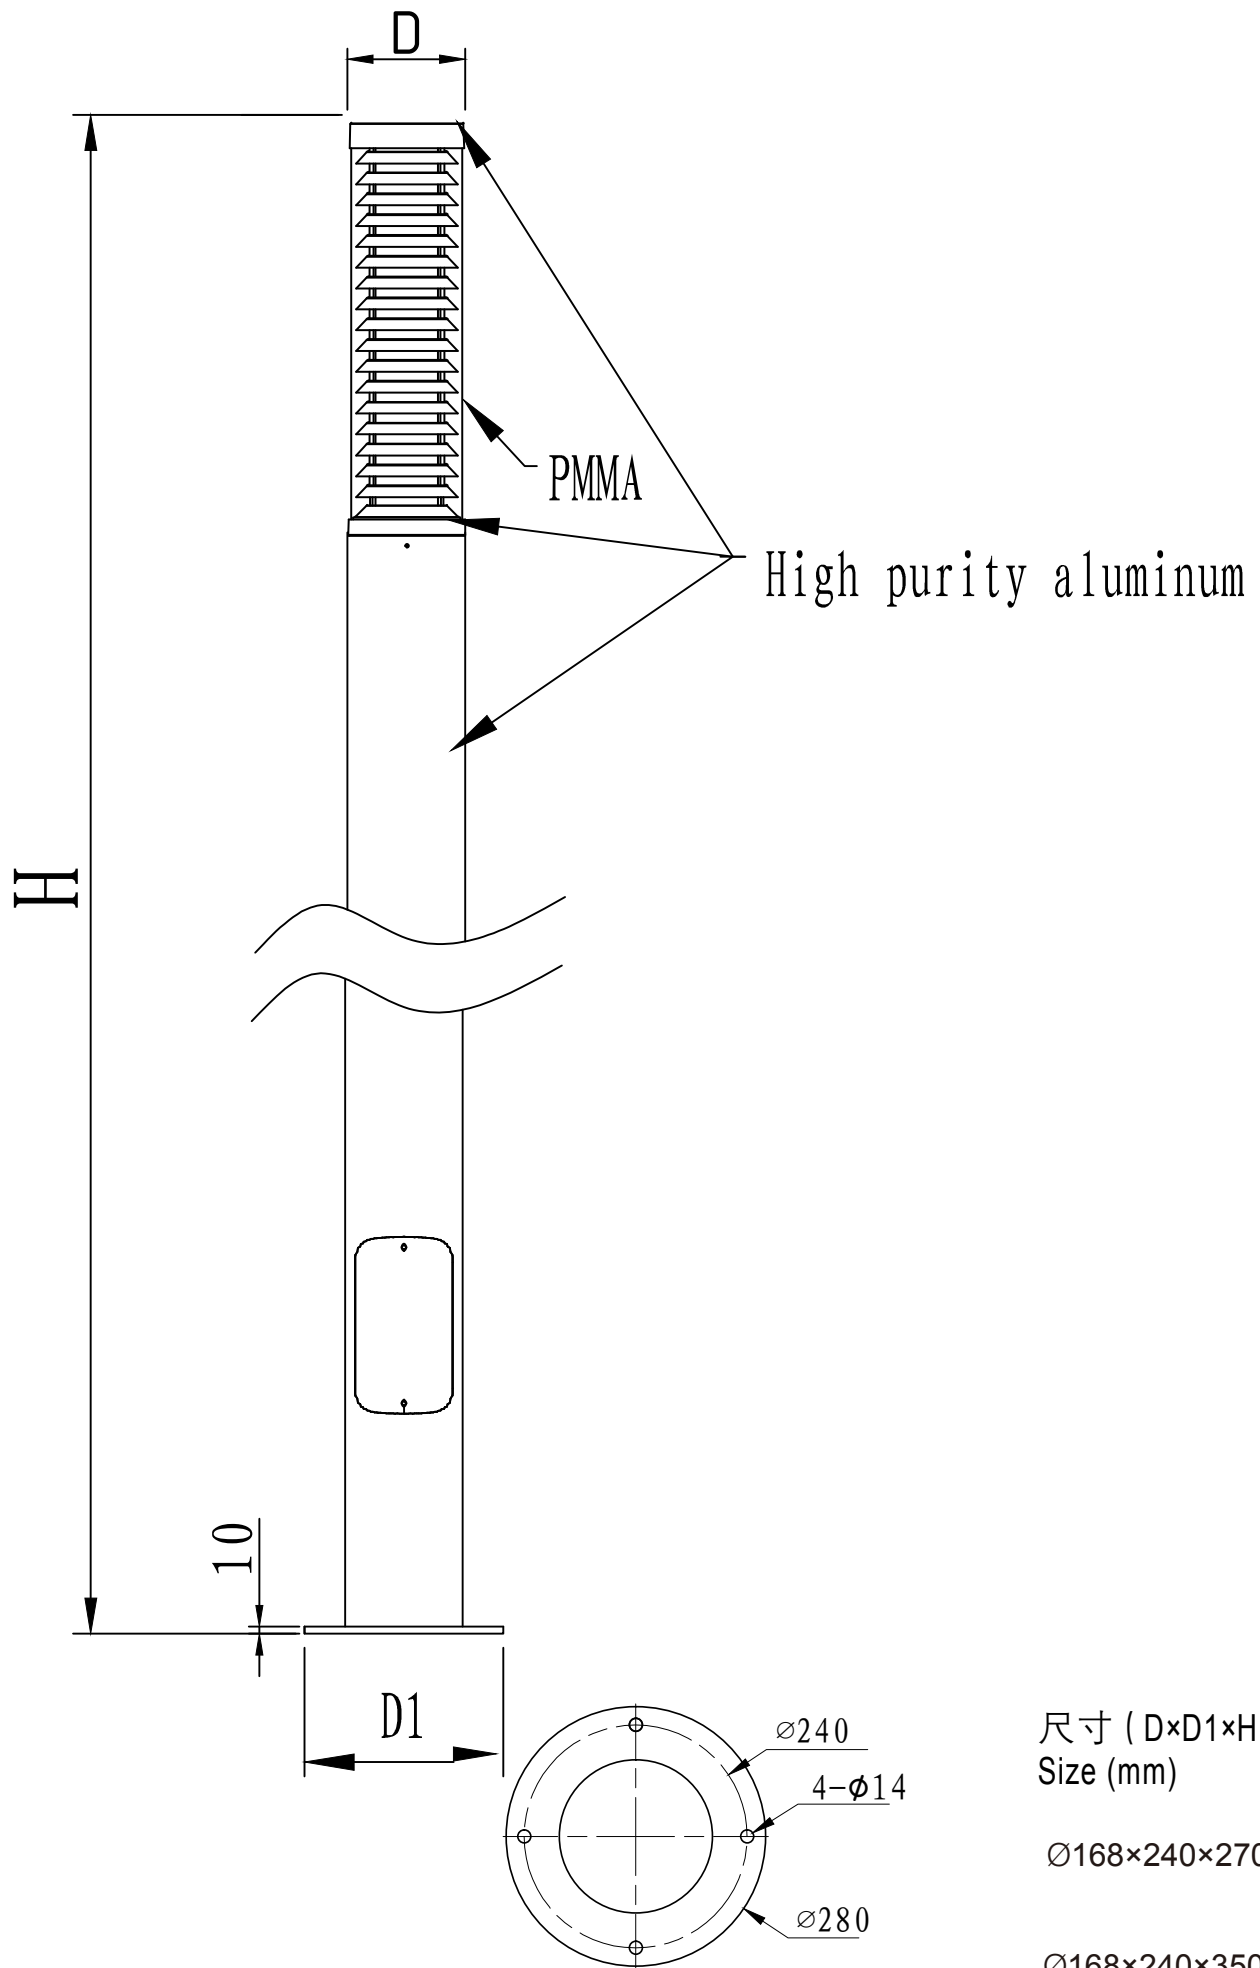

尺寸 (D×D1×H)
 Size (mm)

$\varnothing 168 \times 240 \times 2700$

$\varnothing 168 \times 240 \times 3500$