



T-232 Series



T-232RM
75-120W



T-232RS
40-60W




T-232M
75-120W



T-232W
40-75W

T-232S
40-60W

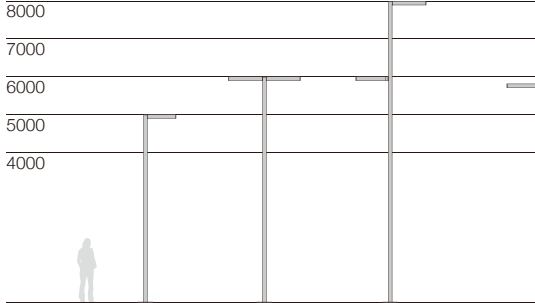

简述 Description




- 铝压铸灯体外壳，超白钢化玻璃，白色PC反射罩
- 高透光PC透镜，具有高视觉舒适性和均匀配光透镜，供多种不同配光选择
- 高性能LED芯片，驱动有0-10V / DALI / 编程电源选择，20KV浪涌保护器
- 灯具采用LED模组，安装更换方便
- 防紫外线聚氨酯粉末喷涂表面，盐雾测试可以达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 道路灯智能远程控制系统可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质





MD-06L LED Module

- Die-casting aluminium body, super white tempered glass, PC white plastic reflector.
- Optics with PC lens with high visual comfortable and uniform lighting distribution, multiple light distribution options.
- High quality LED chips, Driver with 0-10V/DALI/programmed options, and with surge protection up to 20KV.
- LED module is used inside, which is easy to install and replace.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.

应用透镜 Optics application

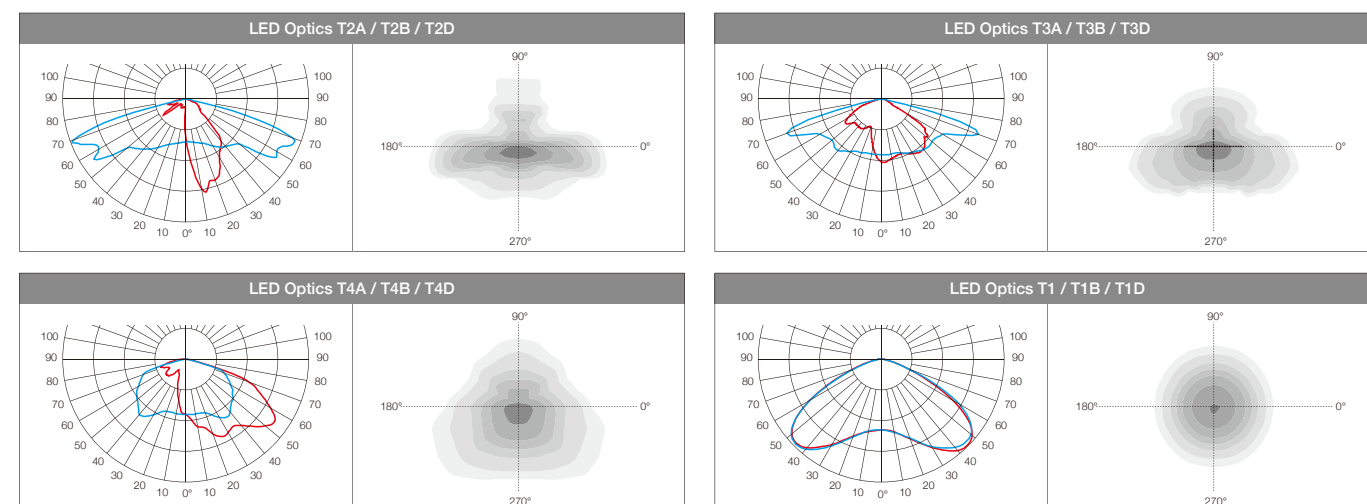

技术参数 Technology data




T-232S

| Code | Power | LED Qty | Optics | Packing Size | Weight | Pcs/20" | Pcs/40" |
|-----------------------|-------|---------|---------------|--------------|--------|---------|---------|
| LED chips - 3535/5050 | | | | | | | |
| T-232SLED40-32 | 40W | 32 | T1/T2A/T3A/T4 | 740*240*140 | 6.3 | 1152 | 2352 |
| T-232SLED60-32 | 60W | 32 | T1/T2A/T3A/T4 | 740*240*140 | 6.3 | 1152 | 2352 |

T-232M

| Code | Power | LED Qty | Optics | Packing Size | Weight | Pcs/20" | Pcs/40" |
|-----------------------|-------|---------|---------------|--------------|--------|---------|---------|
| LED chips - 3535/5050 | | | | | | | |
| T-232MLED75-32 | 75W | 32 | T1/T2A/T3A/T4 | 940*240*140 | 7.5 | 764 | 1792 |
| T-232MLED100-32 | 100W | 32 | T1/T2A/T3A/T4 | 940*240*140 | 7.5 | 764 | 1792 |
| T-232MLED120-32 | 120W | 32 | T1/T2A/T3A/T4 | 940*240*140 | 7.5 | 764 | 1792 |



T-232RS

| Code | Power | LED Qty | Optics | Packing Size | Weight | Pcs/20" | Pcs/40" |
|-----------------------|-------|---------|---------------|--------------|--------|---------|---------|
| LED chips - 3535/5050 | | | | | | | |
| T-232RSLED40-32 | 40W | 32 | T1/T2A/T3A/T4 | 740*240*140 | 7.3 | 1152 | 2352 |
| T-232RSLED60-32 | 60W | 32 | T1/T2A/T3A/T4 | 740*240*140 | 7.3 | 1152 | 2352 |

T-232RM

| Code | Power | LED Qty | Optics | Packing Size | Weight | Pcs/20" | Pcs/40" |
|-----------------------|-------|---------|---------------|--------------|--------|---------|---------|
| LED chips - 3535/5050 | | | | | | | |
| T-232RMLED75-32 | 75W | 32 | T1/T2A/T3A/T4 | 940*240*140 | 8.5 | 764 | 1792 |
| T-232RMLED100-32 | 100W | 32 | T1/T2A/T3A/T4 | 940*240*140 | 8.5 | 764 | 1792 |
| T-232RMLED120-32 | 120W | 32 | T1/T2A/T3A/T4 | 940*240*140 | 8.5 | 764 | 1792 |



T-232W

| Code | Power | LED Qty | Optics | Packing Size | Weight | Pcs/20" | Pcs/40" |
|-----------------------|-------|---------|---------------|--------------|--------|---------|---------|
| LED chips - 3535/5050 | | | | | | | |
| T-232WLED40-32 | 40W | 32 | T1/T2A/T3A/T4 | 740*250*250 | 9.5 | 1152 | 2352 |
| T-232WLED60-32 | 60W | 32 | T1/T2A/T3A/T4 | 740*250*250 | 9.5 | 1152 | 2352 |
| T-232WLED75-32 | 75W | 32 | T1/T2A/T3A/T4 | 740*250*250 | 9.5 | 1152 | 2352 |

可选配件 Accessories options

| | Code |
|--------------------------|-----------|
| 灯杆封盖 Pole Cover | 210004822 |
| 圆杆抱箍组件 Round Pole Hoop | 220003043 |
| 壁装法兰 Wall Mounted Flange | 220003051 |