



KLED

D-170 Serious

/ 20W-350W /

Urban lighting

A Classic Residential Lighting
with Mediterranean style





D-170L
200-350W



D-170M
120-200W




D-170S
75-150W



D-170S2
25-60W



D-170S1
60-100W

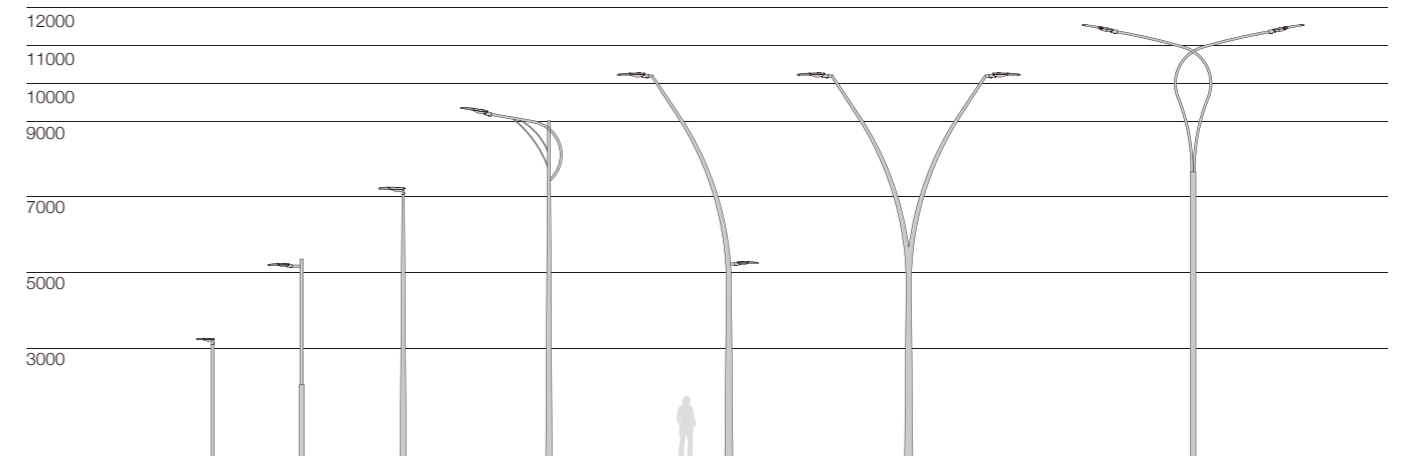




简述 Description



- 铝压铸灯体外壳，超白钢化玻璃
- 高透光PC透镜，具有高视觉舒适性和均匀配光透镜，供多种不同配光选择
- 高性能LED芯片，驱动有0-10V / DALI / 编程电源选择，20KV浪涌保护器
- 按钮式开启配置，内设有开启断电保护器
- 有侧装和顶装2种安装方式，角度可调，安装管径有 $\varnothing 48 / \varnothing 60 / \varnothing 76$ mm
- 防紫外线聚氨酯粉喷涂表面，盐雾测试可以达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 道路灯智能远程控制系统可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质

- Die-casting aluminium body, super white tempered glass.
- Optics with PC lens with high visual comfortable and uniform lighting distribution, multiple light distribution options.
- High quality LED chips, Driver with 0-10V/DALI/programmed be options, and with surge protection up to 20KV.
- Tool-free replaceable with push-button for opened device, automatic on/off connector when be open.
- Top and side fixing, angle can be adjustable, installation tube diameter $\varnothing 48/\varnothing 60/\varnothing 76$ mm.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.

应用透镜 Optics application

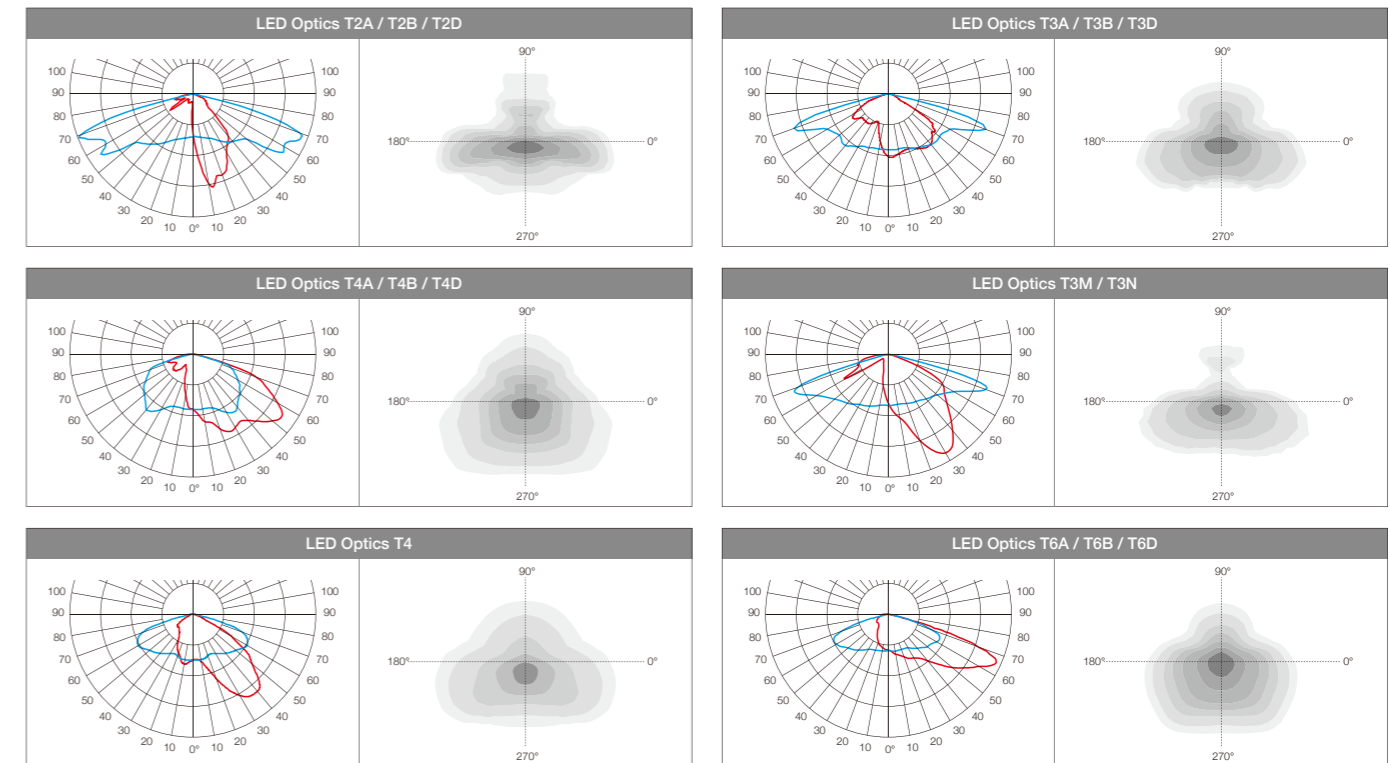



IP66电器腔室，可以接入智能照明控制实现节能
IP66 electrical housing, it can be installed dimming control system to saving energy.



IK09钢化玻璃罩，可适配Zhaga标准PCB板，模组式透镜供多种不同光型可选，以满足不同路面的照明需求
IK09 tempered glass, it is suitable for zhaga standard PCB. Modular lens are available for various light types to meet the lighting requirements of different roads.




灯具免工具打开设计，“L”号灯具采用两边铝压铸扣攀快速打开锁紧系统

Tool-Free design, "L" version with aluminum fastening locker.



灯具免工具打开设计，其他尺寸灯具，背部采用按压式按钮打开系统

Others size version, bottom design locker.

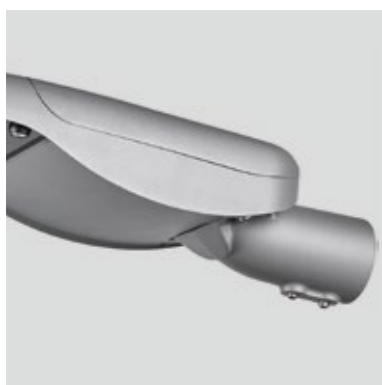

灯具具有横装、竖装二种方式，角度可以±15度调节

Top or side fitting Ø60mm, Ø76 arm be option, ±15° angle adjustable.



5
SIZES



D-170 Series

一组实用型高端LED路灯，灯具共有5个尺寸版本，分别功率从25W-350W，可适用于不同道路功能照明需求，多种光学系统可选配。


A practical high-end LED street lighting, there are five sizes to option, with power from 25W to 350W. It can be used for lighting requirements of different road functions. A variety of optical systems can be selected.

技术参数 Technology data




D-170L

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-170LLED200-96	200W	96	T3A/T4A/T5A/T4	975*470*155	18.4	336	700
D-170LLED240-96	240W	96	T3A/T4A/T5A/T4	975*470*155	18.4	336	700
D-170LLED240-120	240W	120	T3A/T4A/T5A/T4	975*470*155	18.4	336	700
D-170LLED300-120	300W	120	T3A/T4A/T5A/T4	975*470*155	18.4	336	700
D-170LLED350-144	350W	144	T3A/T4A/T5A/T4	975*470*155	18.4	336	700




D-170M

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-170MLED120-48	120W	48	T3A/T4A/T5A/T3M/T4	840*365*150	10.5	560	1176
D-170MLED150-48	150W	48	T3A/T4A/T5A/T3M/T4	840*365*150	10.6	560	1176
D-170MLED150-64	150W	64	T3A/T4A/T5A/T3M/T4	840*365*150	10.6	560	1176
D-170MLED180-64	180W	64	T3A/T4A/T5A/T3M/T4	840*365*150	10.6	560	1176
D-170MLED200-96	200W	96	T3D/T4D/T5D/T3N	840*365*150	10.6	560	1176



D-170S

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-170SLED75-32	75W	32	T2A/T3A/T4A/T3M/T4	685*315*150	7.6	840	1722
D-170SLED100-32	100W	32	T2A/T3A/T4A/T3M/T4	685*315*150	7.6	840	1722
D-170SLED120-48	120W	48	T2A/T3A/T4A/T3M/T4	685*315*150	7.6	840	1722
D-170SLED150-48	150W	48	T2A/T3A/T4A/T3M/T4	685*315*150	7.6	840	1722




LED chips - 3030							
D-170SLED75-112	75W	112	T2B/T3B/T4B	685*315*150	7.6	840	1722
D-170SLED100-168	100W	168	T2B/T3B/T4B	685*315*150	7.6	840	1722
D-170SLED120-168	120W	168	T2B/T3B/T4B	685*315*150	7.6	840	1722



D-170S1

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-170S1LED60-24	60W	24	T2A/T3A/T3M/T4	580*280*150	6.2	1200	2310
D-170S1LED75-36	75W	36	T2D/T3D/T4D/T3N	580*280*150	6.3	1200	2310
D-170S1LED100-36	100W	36	T2D/T3D/T4D/T3N	580*280*150	6.3	1200	2310




LED chips - 3030							
D-170S1LED60-84	60W	84	T2B/T3B/T4B	580*280*150	6.2	1200	2310
D-170S1LED75-84	75W	84	T2B/T3B/T4B	580*280*150	6.3	1200	2310



D-170S2

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-170S2LED25-8	25W	8	T2A/T3A/T4A/T3M/T4	535*215*125	5.1	1904	3927
D-170S2LED40-16	40W	16	T2A/T3A/T4A/T3M/T4	535*215*125	5.2	1904	3927
D-170S2LED60-24	60W	24	T2D/T3D/T4D/T3N	535*215*125	5.2	1904	3927



LED chips - 3030							
D-170S2LED25-28	25W	28	T2B/T3B/T4B	535*215*125	5.1	1904	3927
D-170S2LED40-56	40W	56	T2B/T3B/T4B	535*215*125	5.1	1904	3927
D-170S2LED60-56	60W	56	T2B/T3B/T4B	535*215*125	5.2	1904	3927

可选配件 Accessories options

	Code
Ø76安装座 Fixing Arm	210001086
Ø60安装座 Fixing Arm	210000255
Ø60-48转换套 Adapter	210002547

Arm / Adapter required for install on the pole.



— King-Bridge Lighting —



宁波金羽桥照明科技有限公司

NING KING-BRIDGE LIGHTING TECHNOLOGY CO.,LTD.

地址：浙江省余姚市阳明街道新桥工业区

Add: Xinqiao Industry Zone, Yangming Street, Yuyao City, Zhejiang Province, China

Tel: +86-574-6256 6890

Fax: +86-574-6256 6827

info@kled.com

国内营销中心：金羽桥照明科技（上海）有限公司

地址：上海市长宁区中山西路179号4K室

电话：189 1897 7928