





T-202SS
30-75W



D-202MS
100-150W



D-202SS
60-75W


D-202MH
100-150W

D-202SH
30-75W




一组多功能组合式庭院式路灯，通过不同的支架连接，达到不同的变化效果，来适应不同照明场所的需求，被广泛使用在庭院、小区、公园、步行街等场所。灯具功率范围为30W-150W。

A group of multi-functional street lighting are connected by different brackets to achieve different effects, so as to suit of different area places. It be widely used in courtyards, residential areas, parks, pedestrian streets and other places. The power range is 30W-150W.

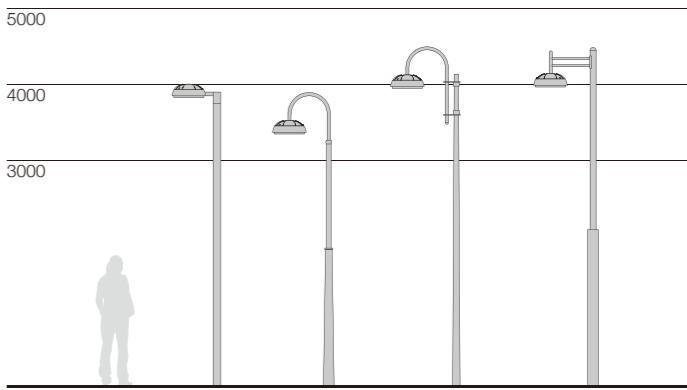

D-202 / T-202 Series


简述 Description



- 铝压铸灯体外壳，超白钢化玻璃，特殊外形设计，有2种尺寸供选择
- 高透光PC透镜，多种光学组件可选，具有高视觉舒适性和防眩效果
- 高性能LED芯片，驱动有ON-OFF / 0-10V / DALI / 编程电源选择，20KV浪涌保护器
- 灯具有不同支架选项，可根据需要选配适用在不同场所
- 防紫外线聚氨酯塑粉喷涂表面，耐腐蚀可以达1000小时以上
- 无生物蓝光危害风险，符号EN62471: 2008标准
- 所有外部螺钉均为304不锈钢材质

- Die-casting aluminium body, super white tempered glass. Special shape design, it has 2 sizes version options.
- Optics with PC lens with high visual comfortable and good anti glare effect, multiple light distribution options.
- High quality LED chips, with ON-OFF/0-10V/DALI/programmed be options, and with surge protection up to 20KV.
- The luminaire have multiple brackets to option, it can suit different application.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, in accordance with EN 62471:2008.
- All external screws are made of 304 stainless steel.

应用透镜 Optics application

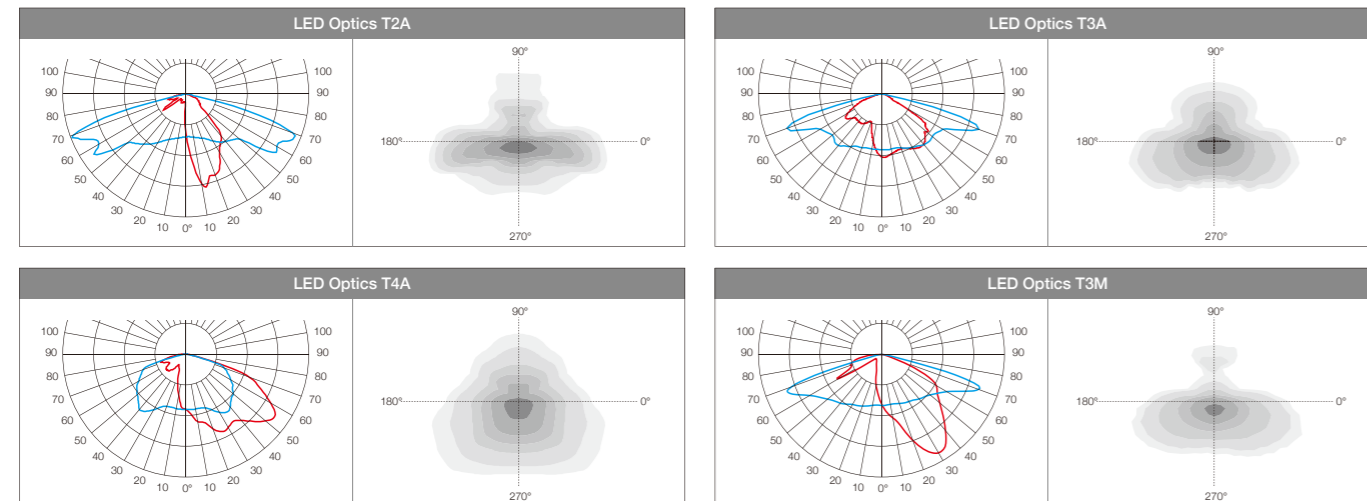


技术参数 Technology data




D-202MH

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-202MHLED100-48	100W	48	T1/T2A/T3A/T4A	545*450*215	11.0	530	1080
D-202MHLED120-48	120W	48	T1/T2A/T3A/T4A	545*450*215	11.0	530	1080
D-202MHLED150-64	150W	64	T1/T2A/T3A/T4A	545*450*215	11.5	530	1080




D-202SH

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-202SHLED30-24	30W	24	T1/T2A/T3A/T4A	460*355*205	7.5	780	1610
D-202SHLED40-24	40W	24	T1/T2A/T3A/T4A	460*355*205	7.5	780	1610
D-202SHLED60-24	60W	24	T1/T2A/T3A/T4A	460*355*205	7.6	780	1610
D-202SHLED75-24	75W	24	T1/T2A/T3A/T4A	460*355*205	7.6	780	1610




T-202SS

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
T-202SSLED30-24	30W	24	T1/T2A/T3A/T4A	350*350*180	6.0	1152	2448
T-202SSLED40-24	40W	24	T1/T2A/T3A/T4A	350*350*180	6.0	1152	2448
T-202SSLED60-24	60W	24	T1/T2A/T3A/T4A	350*350*180	6.1	1152	2448
T-202SSLED75-24	75W	24	T1/T2A/T3A/T4A	350*350*180	6.1	1152	2448




D-202MS

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-202MSLED100-48	100W	48	T1/T2A/T3A/T4A	450*450*200	7.5	660	1430
D-202MSLED120-48	120W	48	T1/T2A/T3A/T4A	450*450*200	7.5	660	1430
D-202MSLED150-64	150W	64	T1/T2A/T3A/T4A	450*450*200	7.5	660	1430



D-202SS

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-202SSLED60-24	60W	24	T1/T2A/T3A/T4A	350*350*180	6.5	1152	2448
D-202SSLED75-36	75W	36	T1/T2A/T3A/T4A	350*350*180	6.6	1152	2448



延伸产品 More in family



TG-202M / TG-202S

Flood Lighting: 75~240W.
Page. 274



F-202M / F-202S

Highbay Lighting: 75~240W.
Page. 318