





T-92 Series



**T-92MP**  
120-180W

**T-92SP**  
60-100W


**T-92MF**  
120-180W

**T-92SF**  
60-100W



一款古典设计的皇冠灯具，配以独特设计的古典灯杆，能很好的融合到建筑应用场景中，灯具功率由60W-180W，配以合适的透镜应用，达到更好的场景应用照明要求。

A classic crown luminaire which equipped with a unique classic pole, it can be well integrated into the architectural application scene. The product power is 60W-180W, equipped with appropriate lens application, it can meet the better lighting requirements of scene application.

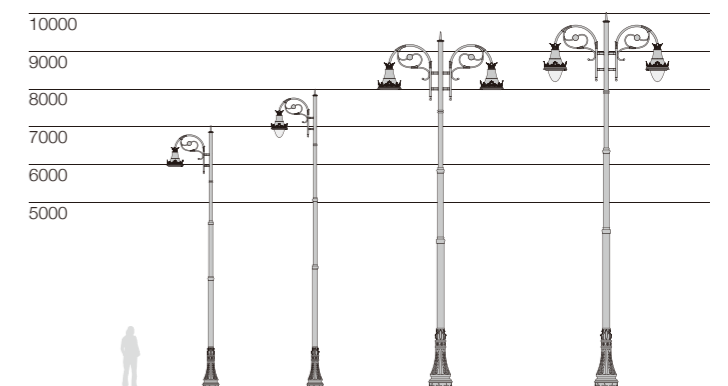

# T-92 Series


## 简述 Description



- 铝压铸灯体外壳，透明PC塑料扩散罩和平面钢化玻璃可以任选
- 高透光PC透镜，具有高视觉舒适性和均匀配光透镜，供多种不同配光选择
- 高性能LED芯片，驱动有0-10V / DALI / 编程电源选择，20KV浪涌保护器
- 古典式外形设计，配有两种安装式样
- 灯具采用LED模组，安装更换方便
- 防紫外线聚氨酯粉喷涂表面，盐雾测试可以达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 道路灯智能远程控制系统可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质

- Die-casting aluminium body, transparent PC plastic diffusion cover or flat tempered glass.
- Optics with PC lens with high visual comfortable and uniform lighting distribution, multiple light distribution options.
- High quality LED chips, Driver with 0-10V/DALI/programmed options, and with surge protection up to 20KV.
- Classical shape design, with two installation type.
- LED module is used inside, which is easy to install and replace.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.

## 应用透镜 Optics application

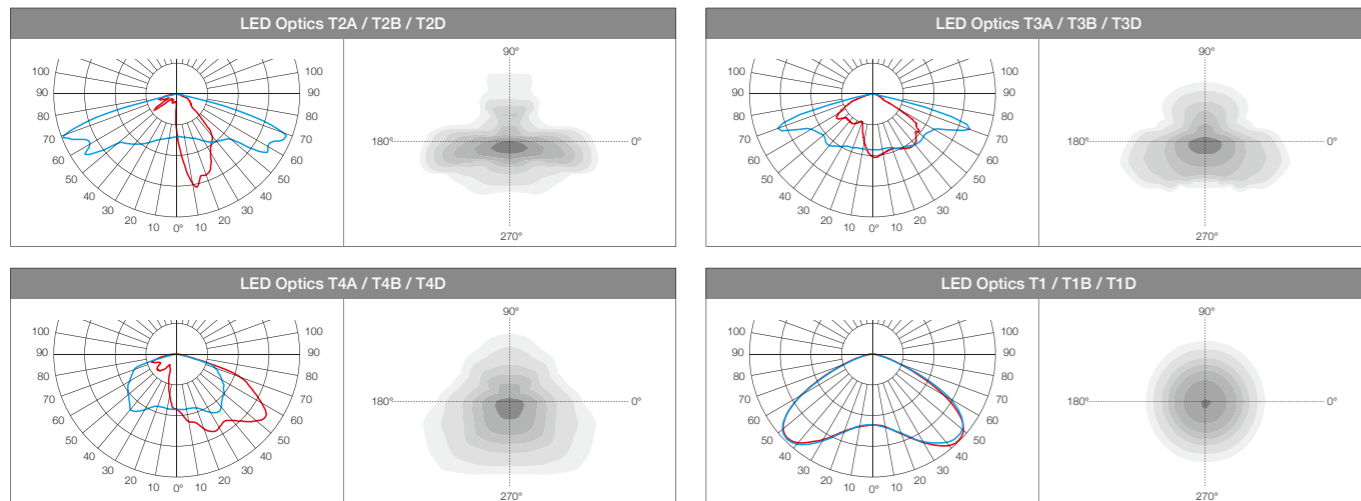


技术参数 Technology data



**T-92MP**

| Code  | Power | LED Qty   | Optics                | Packing Size | Weight | Pcs/20" | Pcs/40" |
|---|-------|-----------|-----------------------|--------------|--------|---------|---------|
| LED chips - 3535/5050   |       |           |                       |              |        |         |         |
| <b>T-92MPLED120-48</b> <span style="border: 1px solid black; padding: 0 2px;">A3</span> | 120W  | <b>48</b> | T1/T2A/T3A/T4A/T3M/T4 | 590*590*560  | 13.8   | 108     | 240     |
| <b>T-92MPLED150-48</b> <span style="border: 1px solid black; padding: 0 2px;">A3</span> | 150W  | <b>48</b> | T1/T2A/T3A/T4A/T3M/T4 | 590*590*560  | 13.8   | 108     | 240     |
| <b>T-92MPLED180-72</b> <span style="border: 1px solid black; padding: 0 2px;">D3</span> | 180W  | <b>72</b> | T1D/T2D/T3D/T4D/T3N   | 590*590*560  | 14.0   | 108     | 240     |



PC Cover:  
415\*415\*640/5pcs

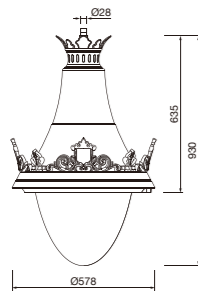

**T-92SP**



| Code  | Power | LED Qty   | Optics         | Packing Size | Weight | Pcs/20" | Pcs/40" |
|---|-------|-----------|----------------|--------------|--------|---------|---------|
| LED chips - 3535/5050   |       |           |                |              |        |         |         |
| <b>T-92SPLED60-36</b> <span style="border: 1px solid black; padding: 0 2px;">A2</span>  | 60W   | <b>36</b> | T1/T2A/T3A/T4A | 500*500*480  | 11.2   | 165     | 350     |
| <b>T-92SPLED75-36</b> <span style="border: 1px solid black; padding: 0 2px;">A2</span>  | 75W   | <b>36</b> | T1/T2A/T3A/T4A | 500*500*480  | 11.2   | 165     | 350     |
| <b>T-92SPLED100-36</b> <span style="border: 1px solid black; padding: 0 2px;">A2</span> | 100W  | <b>36</b> | T1/T2A/T3A/T4A | 500*500*480  | 11.5   | 165     | 350     |

PC Cover:  
345\*345\*425/5pcs

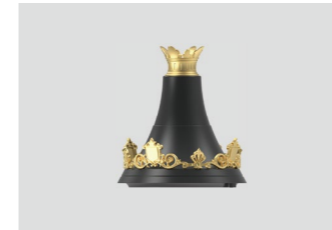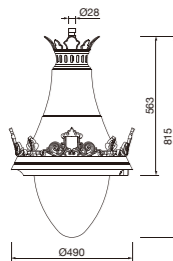


**T-92MF**

| Code  | Power | LED Qty   | Optics                | Packing Size | Weight | Pcs/20" | Pcs/40" |
|---|-------|-----------|-----------------------|--------------|--------|---------|---------|
| LED chips - 3535/5050   |       |           |                       |              |        |         |         |
| <b>T-92MFLED120-48</b> <span style="border: 1px solid black; padding: 0 2px;">A3</span> | 120W  | <b>48</b> | T1/T2A/T3A/T4A/T3M/T4 | 590*590*560  | 13.8   | 108     | 240     |
| <b>T-92MFLED150-48</b> <span style="border: 1px solid black; padding: 0 2px;">A3</span> | 150W  | <b>48</b> | T1/T2A/T3A/T4A/T3M/T4 | 590*590*560  | 13.8   | 108     | 240     |
| <b>T-92MFLED180-72</b> <span style="border: 1px solid black; padding: 0 2px;">D3</span> | 180W  | <b>72</b> | T1D/T2D/T3D/T4D/T3N   | 590*590*560  | 14.0   | 108     | 240     |

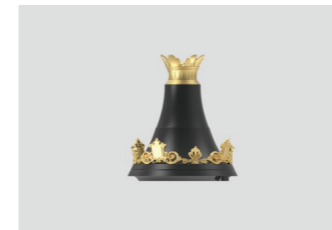





**T-92SF**

| Code  | Power | LED Qty   | Optics         | Packing Size | Weight | Pcs/20" | Pcs/40" |
|---|-------|-----------|----------------|--------------|--------|---------|---------|
| LED chips - 3535/5050   |       |           |                |              |        |         |         |
| <b>T-92SFLED60-36</b> <span style="border: 1px solid black; padding: 0 2px;">A2</span>  | 60W   | <b>36</b> | T1/T2A/T3A/T4A | 500*500*480  | 11.2   | 176     | 384     |
| <b>T-92SFLED75-36</b> <span style="border: 1px solid black; padding: 0 2px;">A2</span>  | 75W   | <b>36</b> | T1/T2A/T3A/T4A | 500*500*480  | 11.2   | 176     | 384     |
| <b>T-92SFLED100-36</b> <span style="border: 1px solid black; padding: 0 2px;">A2</span> | 100W  | <b>36</b> | T1/T2A/T3A/T4A | 500*500*480  | 11.5   | 176     | 384     |



可选配件 Accessories options

|   |                        | Code             |
|---|------------------------|------------------|
|  | 接杆组件 Connect Adaptor   | <b>250000460</b> |
|  | 顶冠 Top Crown           | <b>210004696</b> |
|  | 小花冠组件 Small Crown Part | <b>210004700</b> |
|  | 大花冠组件 Large Crown Part | <b>210004698</b> |