

The photograph may not match the reference exactly. Please read the product description to identify the finish.

**TECeNfCAi CeARACTERfSTfCS**



Product Model:	X-03LED25-108
IP Protection degrees:	IP65
IK Protection degrees:	IK09
Light source:	108x SMD 2835
Total power consumption:	26W
Luminous Flux:	2350Lm
Luminous efficiency:	90~100Lm/w
Color temperature:	4000K as standard. Optinal 2700K,3000K & 5700K. Amber LED available
Voltage/Frequency:	100-240V/50-60Hz
Warranty(Years):	3
Units per box:	1
Net Weight(Kg)	2.2

**MATERIALS / FINISHES**


<b>Structure material:</b> High purity aluminium	<b>Diffuser material:</b> PC
<b>Structure finish:</b> Silver	<b>Diffuser finish:</b> Transparent

**GEAR**


Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

Lm<sup>(N)</sup>: Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

PC

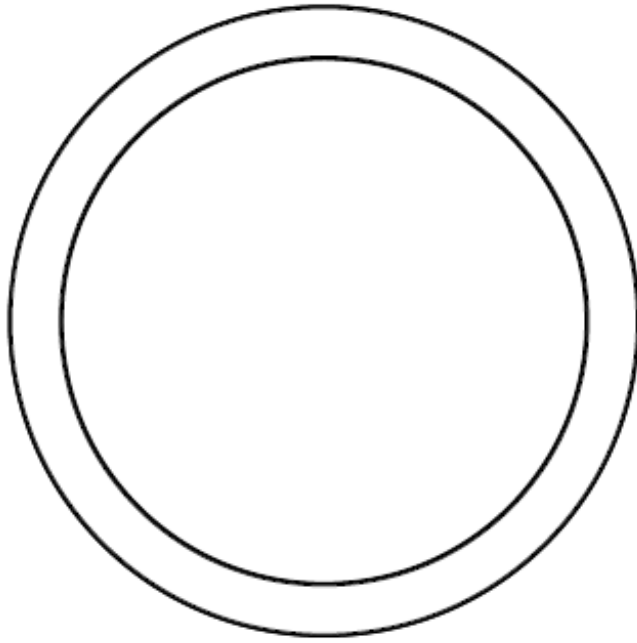

High purity aluminum

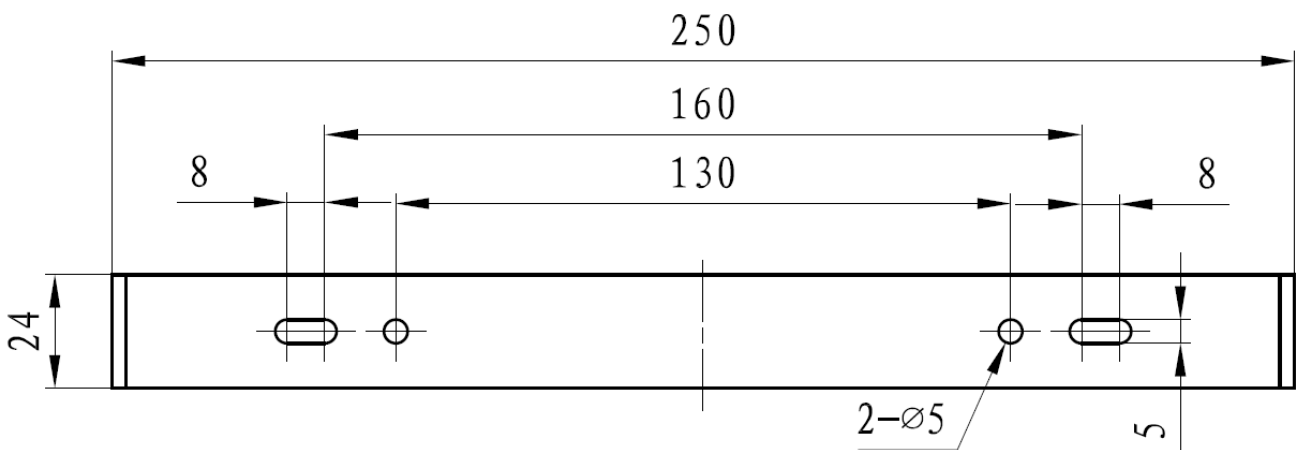

installation template