



简述 Description



- 铝压铸盖帽，铝合金拉伸灯体，可根据需要截取不同高度
- 高透明PC扩散罩，能有效防止发黄老化
- 防紫外线聚氨酯塑粉喷涂表面，耐腐蚀可以达1000小时以上
- 灯具表面最高温度不超过50度，安全可靠
- 所有外部螺钉均为304不锈钢材质，底座埋件额外可选配


- Aluminum die casting cover, extruded aluminum body, it can be cut different height.
- High transparent PC diffuser, it can effectively prevent yellowing and aging.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- The maximum surface temperature of all accessible part under 50 degrees for safety and reliable.
- All external screws are made of 304 stainless steel, Additional optional base embedded parts.



C-140  
10W/15W

C-140D  
15W/25W

配光曲线 Photometric Data

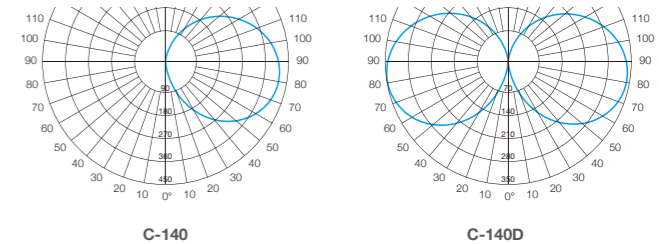

技术参数 Technology data

Code	Power	LED Qty	Input Voltage	Packing Size	Weight
LED chips - 2835					
C-140LED10-84H45	10W	84	100V-240V	520*285*300/6pcs	12.2
C-140LED15-120H60	15W	120	100V-240V	670*285*300/6pcs	14.2
LED chips - 2835					
C-140DLED15-168H45	15W	168	100V-240V	520*285*300/6pcs	12.6
C-140DLED25-240H60	25W	240	100V-240V	670*285*300/6pcs	14.8

可选配件 Accessories options

	Code
防水接线盒 Terminal Box	230000232

延伸产品 More in family



B-140  
Wall Lighting: 6W.  
Page. 418

B-140D  
Wall Lighting: 12W.  
Page. 418

