


The photograph may not match the reference exactly.  
Please read the product description to identify the finish.



### TECHNICAL CHARACTERISTICS

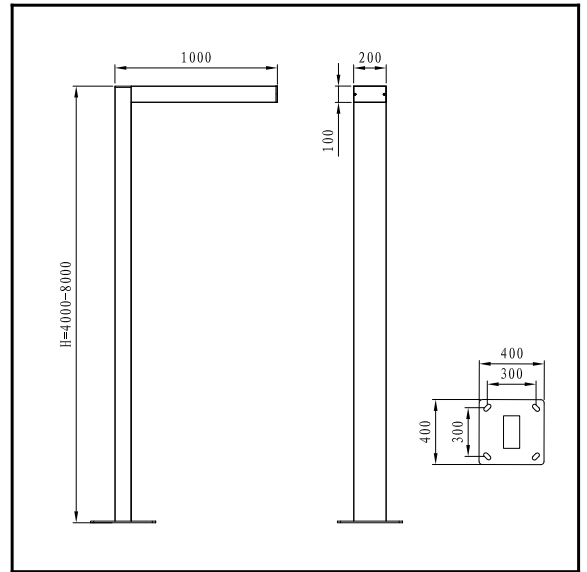

Product Model:	T-231LED60-32	T-231LED80-32	T-231LED100-32	T-231LED120-32
IP Protection degrees:	IP66			
IK Protection degrees:	IK08			
Light source:	32 x LED CREE / 32 x LUXEON 5050			
Total power consumption:	60W	80W	100W	120W
Luminous Flux:	6000-9000Lm	8000-12000Lm	10000-15000Lm	12000-18000Lm
Luminous efficiency:	100-150Lm/w			
Color temperature:	4000K as standard. Optimal 2700K, 3000K & 5700K. Amber LED available			
Voltage/Frequency:	100-240V/50-60Hz			
Warranty (Years):	5			
Units per box:	1			
Net Weight (Kg)	BODY:7.5	BODY:7.8		
Aerodynamic resistance (CxS)	0.178			

### MATERIALS / FINISHES

<b>Structure material:</b> High purity aluminium	<b>diffuser material:</b> Glass
<b>Structure finish:</b> Silver	<b>Diffuser finish:</b> Transparent


### GEAR

Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

Lm<sup>(N)</sup>: Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

Kled reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product.  
Please consult the sales team to clarify any doubt.

Tel.: +86 574 62566 890  
Email: info@kled.com.cn  
http://www.kled.com.cn/

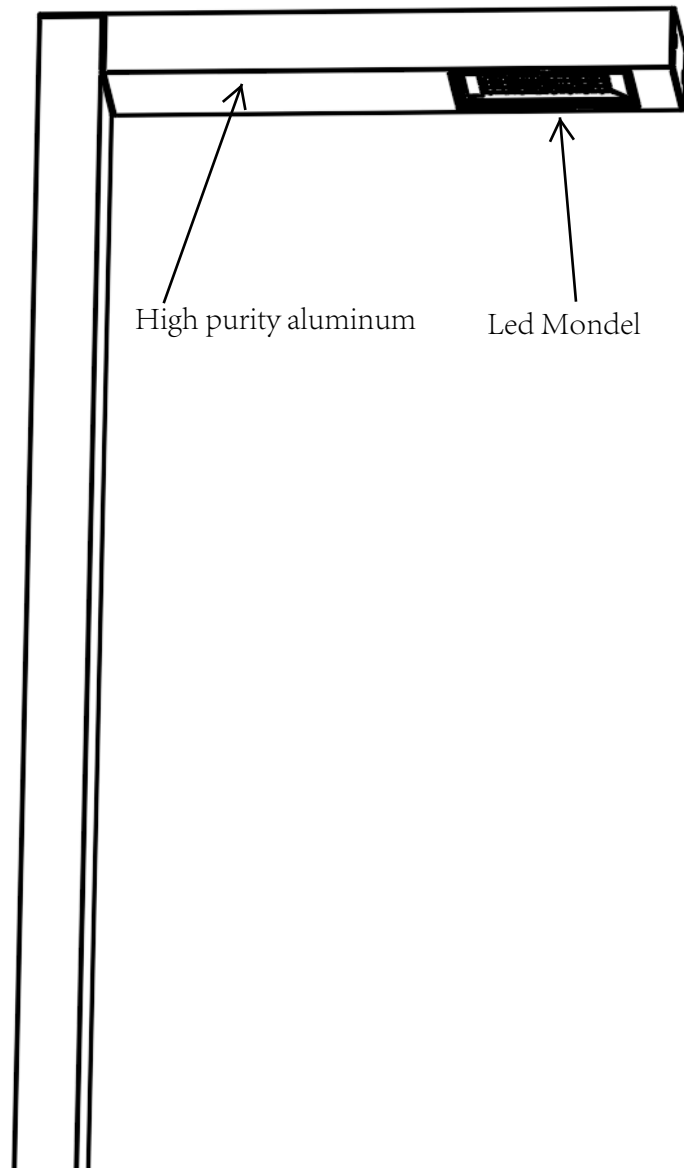

High purity aluminum

Led Mondel

installation template

# OUTDOOR

## Optional light pole

	size (mm)	Installed base (mm)	Ø pernos (mm)
5M	200X100	300X300	M22
6M	200X100	300X300	M22
8M	200X100	300X300	M22

