




单色白光
Monochromatic White: DMX




RGB变色
RGB: DMX



RGBW变色
RGBW: DMX

简述 Description



- 挤出铝型材灯体，铝压铸端盖配高温硅胶密封条
- 超白丝印钢化玻璃，具有高视觉舒适性和均匀配光
- 防紫外线聚氨酯塑粉喷涂表面，耐腐蚀可以达1000小时以上
- 可在地板、墙壁和天花板进行嵌入式安装
- 多种光学组件可选，适用于不同要求照明场合
- 灯具表面最高温度不超过50°C，安全可靠
- 所有外部螺钉均为304不锈钢材质
- 灯具符合EN60598-1技术标准要求

功率: 7W / 12W / 18W
光效: 90-100 Lm/W (Ra80)
色温: 2700K / 3000K / 4000K
输入电压: DC 24V
功能选项: Switch / DMX

- Extruded aluminium body and flush end cover in die-casting complete with silicone gaskets.
- Super white tempered glass, with high visual comfort and uniform lighting distribution.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- Wall and ceiling mount as well as support with adjustable arms.
- Multiple optics be options, suitable for lighting requirements in different applications.
- The maximum surface temperature of all contact temperature <50°C for safety and reliable.
- All external screw are made of 304 stainless steel.
- The luminaire technical characteristics conform to EN 60598-1 standards.

Power: 7W / 12W / 18W
Nominal efficacy: 90-100 Lm/W (Ra80)
CCT: 2700K / 3000K / 4000K
Input voltage: DC 24V
Options: Switch / DMX

- **应用场合:** 广场、建筑物、雕塑、标志物、广告牌等景观照明场所
- **Applications:** For landscape lighting places such as square, buildings, sculptures, signs and billboards.

规格选项 Flexibility

此洗墙灯有三个主要尺寸规格，包括单色白光和彩色混光（RGB，RGBW），对于相同长度的灯具，可灵活选择不同光学配件，为每个照明设计方案提供优异的性能和最大的灵活性

This kind of linear is available in 3 main lengths with LED monochrome white and colour light, and each linear has some optics options for wall washing, it provide exceptional performance and maximum flexibility for every lighting design solution.



L=430mm / P=8W



L=638mm / P=12W



L=950mm / P=18W

工作电压 Working voltage

单色线条灯都配有稳压专用电路，即使输入电压在16V-30V之间变化也能保证灯具正常工作

The monochrome linear is fitted with an exclusive electronic circuit which guarantees constant emissions in the input voltage from 16V to 30V.

Constant luminous flux emitted on the entire line (DC 24V)




* 每个串接回路上灯具连接数量不能超过30米

* The number of linear connected on each series circuit shall not up to 30m.


安装应用 Applications

在多种的安装环境中有不同的安装方案以适应建筑照明需求


For different installation system in a broad variety of applications in every architectural context.



顶装
Ceiling-mounted




可调节壁挂式
Wall-mounted with adjustable arms



可调节壁挂式
Wall-mounted with adjustable arms

发光角度 Optics



技术参数 Technology data



L-05L

Code	Power	LED Qty	Control Options	Input Voltage	Optics	Packing Size	Weight
LED chips - 3535/3030 L-05LED18-18L100	18W	18	Switch / DMX	DC 24V	TL14	1000*210*185/4pcs	8.5
LED chips - RGB L-05LED18-18RGBL100	18W	18	DMX	DC 24V	TL14	1000*210*185/4pcs	8.8
LED chips - RGBW L-05LED18-18RGBWL100	18W	18	DMX	DC 24V	TL14	1000*210*185/4pcs	8.8




L-05M

Code	Power	LED Qty	Control Options	Input Voltage	Optics	Packing Size	Weight
LED chips - 3535/3030 L-05LED12-12L65	12W	12	Switch / DMX	DC 24V	TL14	688*210*185/4pcs	6.5
LED chips - RGB L-05LED12-12RGBL65	12W	12	DMX	DC 24V	TL14	688*210*185/4pcs	6.8
LED chips - RGBW L-05LED12-12RGBWL65	12W	12	DMX	DC 24V	TL14	688*210*185/4pcs	6.8



L-05S

Code	Power	LED Qty	Control Options	Input Voltage	Optics	Packing Size	Weight
LED chips - 3535/3030 L-05LED8-8L45	8W	8	Switch / DMX	DC 24V	TL14	480*210*185/4pcs	4.5
LED chips - RGBW L-05LED8-8RGBWL45	8W	8	DMX	DC 24V	TL14	480*210*185/4pcs	4.8

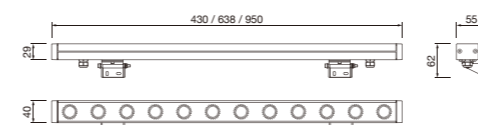

可选配件 Accessories options

	Code
安装支架 Bracket	210004912
快插接头公 Quick Male Connector	320000542
快插接头母 Quick Female Connector	320000543