




TG-120S1
25-40W



TG-120S1N
40-75W

简述 Description




- 铝压铸灯体外壳，超白钢化玻璃，特殊外形设计，有3种光学系统供选择
- 高性能LED芯片，有ON-OFF / DALI / DMX多种控制程序选项
- 防紫外线聚氨酯塑粉喷涂表面，耐腐蚀可以达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 所有外部螺钉均为304不锈钢材质
- Die-casting aluminium body, super white tempered glass. Special shape design, it has 3 type optical options.
- High quality LED chips, with ON-OFF/DALI/ DMX programmed options.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, in accordance with EN 62471:2008.
- All external screws are made of 304 stainless steel.

功率: 25W-75W
 光效: 110-145 Lm/W
 色温: 3000K / 4000K / 5000K
 显色指数: >70Ra / 80Ra / 90Ra
 功能选项: ON-OFF / DALI / DMX

Power: 25W-75W
 Nominal efficacy: 110-145 Lm/W
 CCT: 3000K / 4000K / 5000K
 CRI: >70Ra / 80Ra / 90Ra
 Options: ON-OFF / DALI / DMX

- 应用场合: 广场、建筑物、雕塑、标志物、广告牌等景观照明场所
- Applications: For landscape lighting places such as square, buildings, sculptures, signs and billboards.


安装应用 Applications

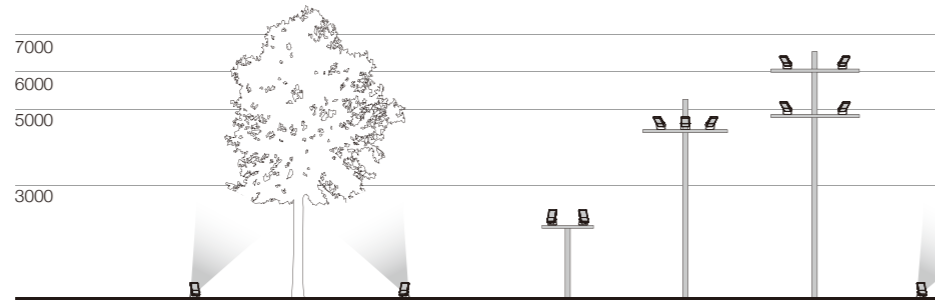


组合不对称透镜 Asymmetric lens optics



组合对称透镜 Symmetric lens optics

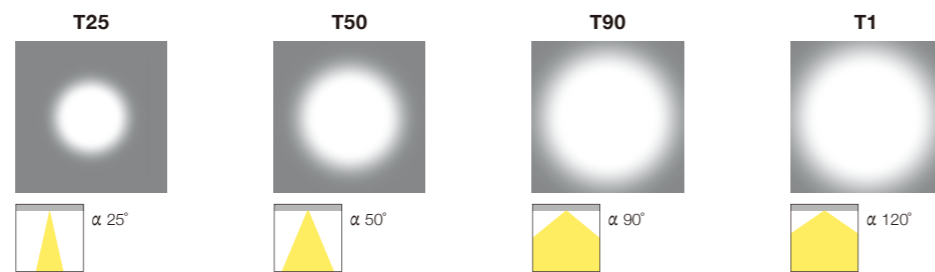

单颗透镜 Single lens optics

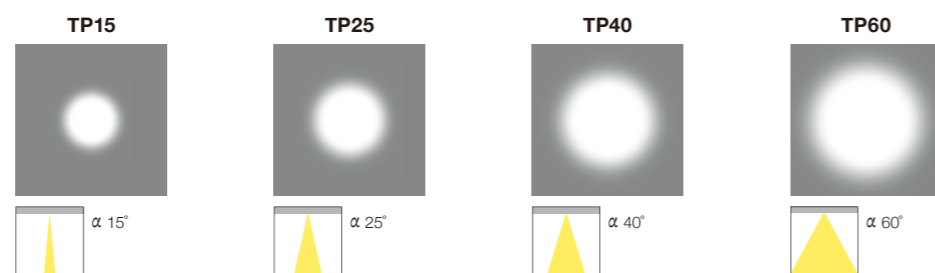


技术参数 Technology data




TG-120S1N

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
TG-120S1NLED40-24	40W	24	T25/T50/T90/T1/T3A/T4A	420*270*85	4	2664	5520
TG-120S1NLED60-24	60W	24	T25/T50/T90/T1/T3A/T4A	420*270*85	4.1	2664	5520
TG-120S1NLED75-24	75W	24	T25/T50/T90/T1/T3A/T4A	420*270*85	4.1	2664	5520




TG-120S1

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
TG-120S1RLED25-16	25W	16	TP15/TP25/TP40/TP60	340*240*75	3.2	4226	8802
TG-120S1RLED50-16	50W	16	TP15/TP25/TP40/TP60	340*240*75	3.2	4226	8802



延伸产品 More in family



D-120MN / D-120SN

Street Lighting: 60~180W.
Page. 118



S-120MN / S-120SN

Tunnel Lighting: 60~180W.
Page. 314