






T-231 Series

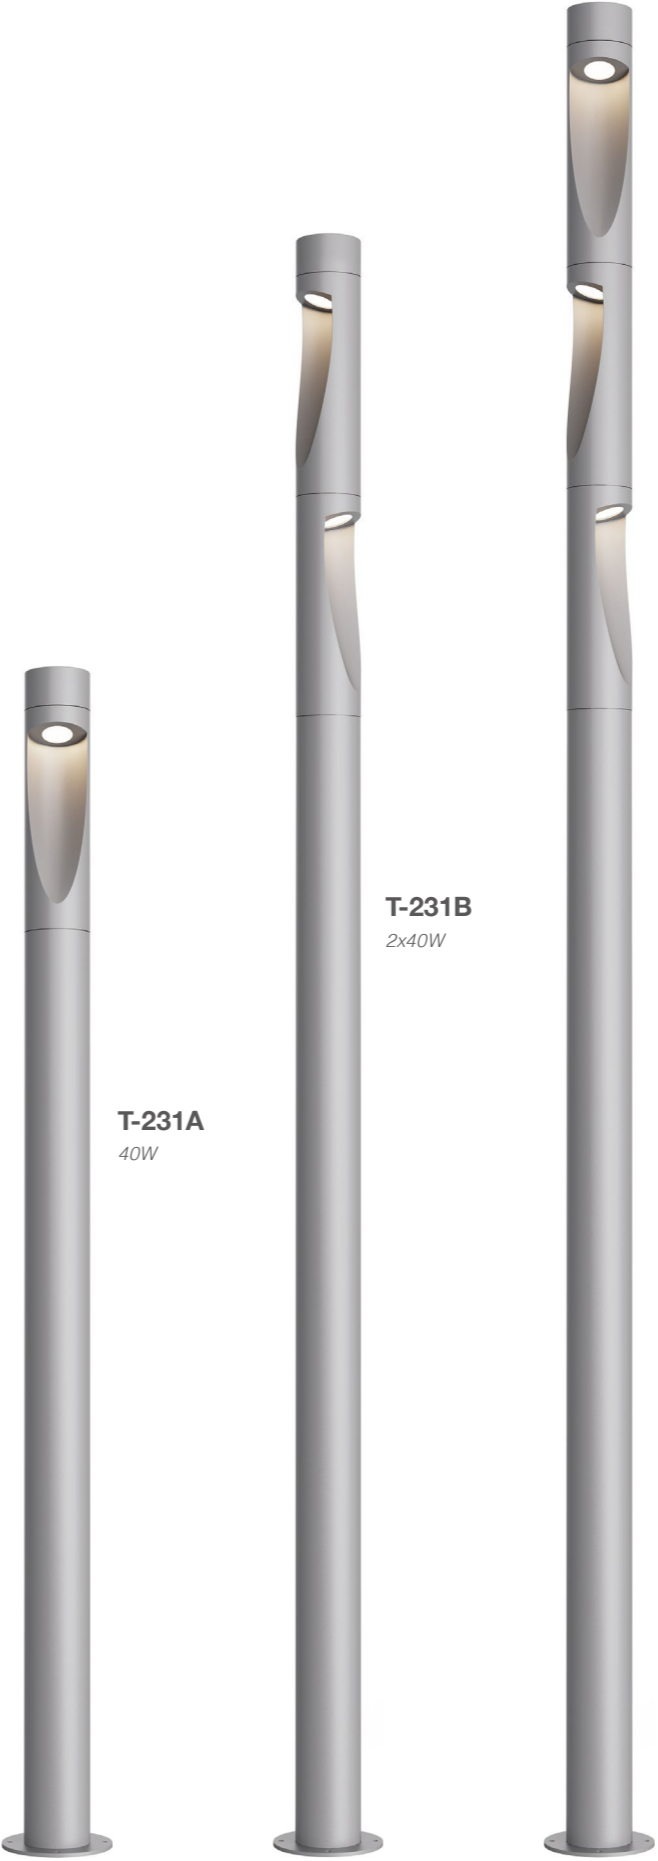

T-231A
40W


T-231B
2x40W

T-231C
3x40W



一组加入现代元素设计的模组组合式庭院灯具，灯具外形设计简洁，通过几个模组旋转组合来适应不同场所照明应用，灯具功率40W-120W。

A group of modular designed lighting with modern elements. The simple shape design. Through the combination of several module rotation angles to adapt to the lighting application, the lighting power is 40W-120W.

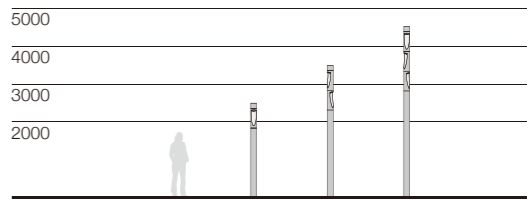


简述 Description



- 铝压铸灯体外壳，铝合金拉伸灯杆，高度根据客户要求截取
- 模组式光源模块配超白钢化玻璃，外加防眩罩，具有很高视觉舒适性
- 驱动有0-10V / DALI / 编程电源选择，20KV浪涌保护器
- 模块式电器部件，安装更换方便
- 防紫外线聚氨酯粉喷涂表面，盐雾测试可以达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 道路灯智能远程控制系统可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质

- Aluminum die casting cover, extruded aluminum body, it can be cut different height.
- LED module design and with supper tempered gals, It has good visual comfortable light effect.
- High quality LED chips, Driver with 0-10V/DALI/programmed options, and with surge protection up to 20KV.
- LED module is used inside, Integrated electrical components which is easy to install and replace.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.

应用透镜 Optics application

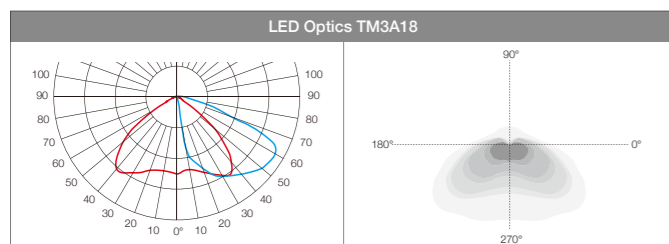

技术参数 Technology data



T-231A

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 5050							
T-231ALED40-18H200	40W	18	TM3A18	2050*295*295	20.5	133	280
T-231ALED40-18H250	40W	18	TM3A18	2550*295*295	25.5	98	196




T-231B

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 5050							
T-231BLEd80-36H270	80W	36	TM3A18	2750*295*295	27	98	196
T-231BLEd80-36H350	80W	36	TM3A18	Head: 1660*200*205 Pole: 2310*295*305	21 10	99	214



T-231C

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 5050							
T-231CLEd120-54H350	120W	54	TM3A18	Head: 2550*200*205 Pole: 1730*295*305	22 8	100	203
T-231CLEd120-54H400	120W	54	TM3A18	Head: 2550*200*205 Pole: 2230*295*305	25.5 8.5	88	176
T-231CLEd120-54H450	120W	54	TM3A18	Head: 2550*200*205 Pole: 2730*295*305	29 9	74	151

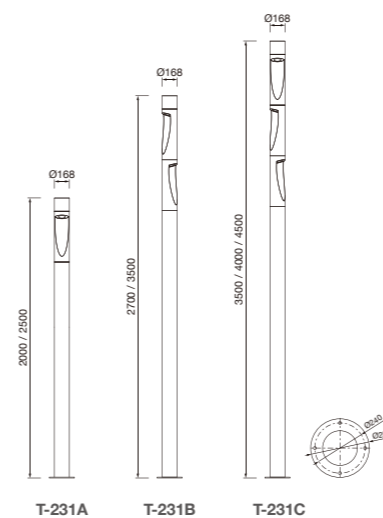

延伸产品 More in family



C-231A / C-231B

Bollard Lighting: 15W.
Page. 372

可选配件 Accessories options

	Code
接线盒 Junction Box	230000199
基础螺杆 Anchor Bolts	250000293