



KLED
**T-160L/
D-160H**

/ 40W-100W /

Urban lighting

A Classic Residential Lighting
with Mediterranean style




T-160L / D-160H

Exclusivity in Spain




T-160L
40-75W

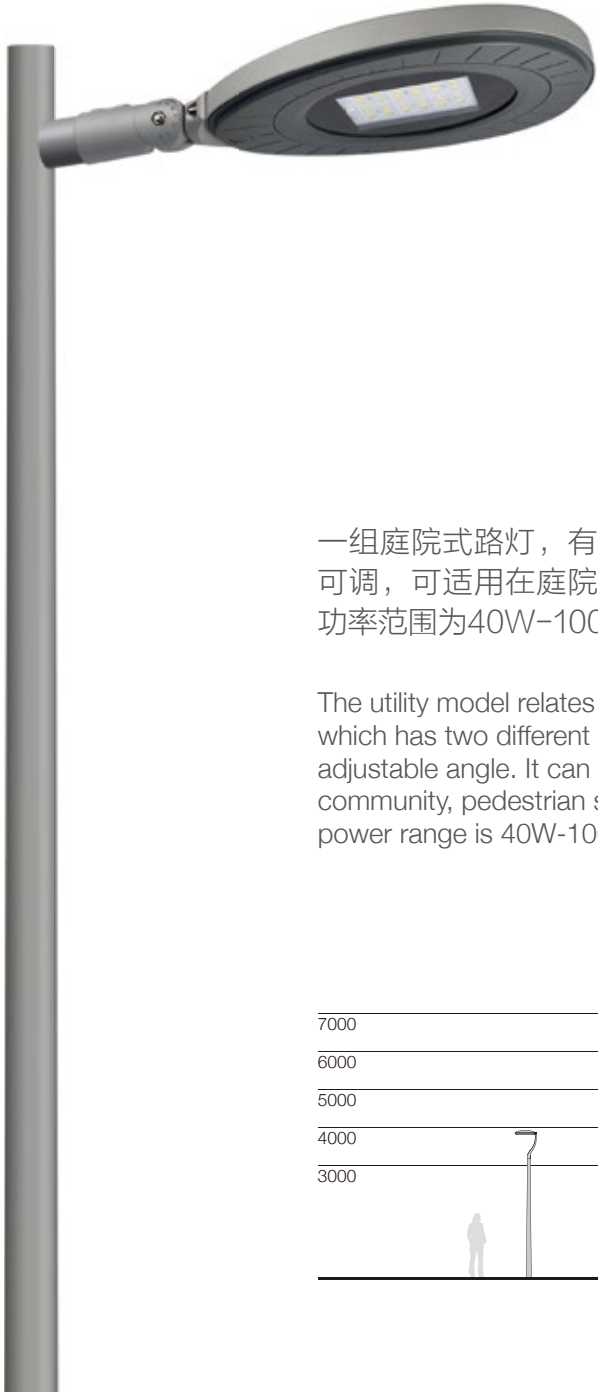

D-160H
40-100W

一组庭院式路灯，有二种不同安装支架，角度可调，可适用在庭院、小区、步行街等场所，功率范围为40W-100W。

The utility model relates to a courtyard street lighting, which has two different mounting brackets and adjustable angle. It can be used in courtyard, community, pedestrian street and other places. The power range is 40W-100W.

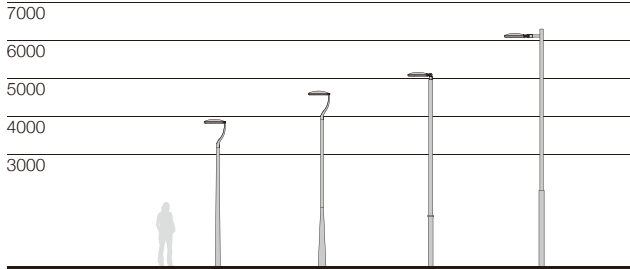

T-160L / D-160H

Exclusivity in Spain



简述 Description




- 铝压铸灯体外壳，超白钢化玻璃
- 高透光PC透镜，具有高视觉舒适性和均匀配光透镜，供多种不同配光选择
- 高性能LED芯片，驱动有0-10V / DALI / 编程电源选择，20KV浪涌保护器
- 有多种安装支架供选择搭配，形成多款不同外形灯具
- 有侧装和顶装2种安装方式，角度可调，安装管径有Ø48 / Ø60mm
- 防紫外线聚氨酯粉末喷涂表面，盐雾测试可以达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 道路灯智能远程控制系統可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质



- Die-casting aluminium body, super white tempered glass.
- Optics with PC lens with high visual comfortable and uniform lighting distribution, multiple light distribution options.
- High quality LED chips, Driver with 0-10V/DALI/programmed be options, and with surge protection up to 20KV.
- There are a variety of mounting brackets options, form of different shapes of lightng.
- Top and side fixing, angle can be adjustable, installation tube diameter Ø48/Ø60mm.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.



应用透镜 Optics application

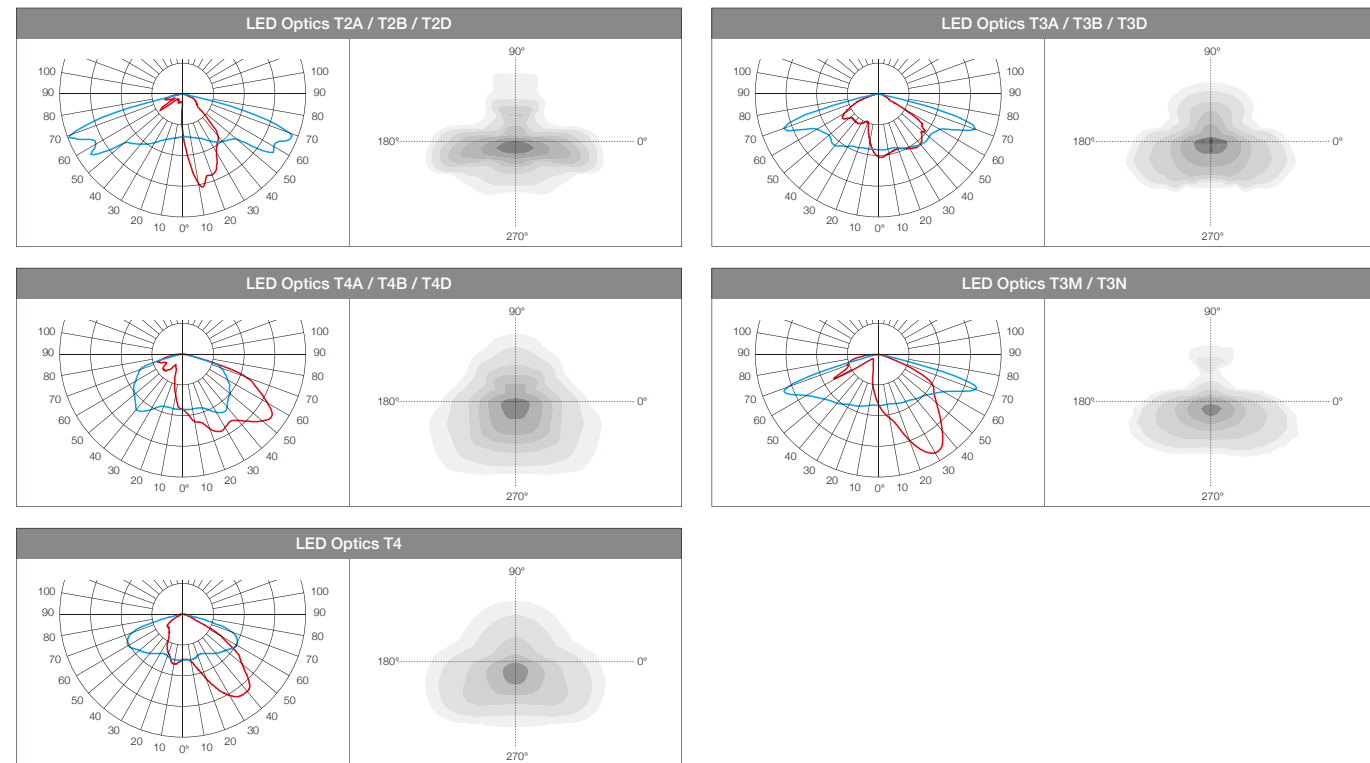

技术参数 Technology data



T-160L

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050				Body:			
T-160LLED40-24 A2	40W	24	T1/T2A/T3A/T4A/T3M/T4	570*500*155	10.2	512	1080
T-160LLED60-24 A2	60W	24	T1/T2A/T3A/T4A/T3M/T4	570*500*155	10.2	512	1080
T-160LLED75-36 A2	75W	36	T1/T2A/T3A/T4A/T3M/T4	570*500*155	10.2	512	1080

LED chips - 3030

T-160LLED40-56 B4	40W	56	T1B/T2B/T3B/T4B	570*500*155	10.2	512	1080
T-160LLED60-84 B2	60W	84	T1B/T2B/T3B/T4B	570*500*155	10.2	512	1080
T-160LLED75-84 B2	75W	84	T1B/T2B/T3B/T4B	570*500*155	10.2	512	1080

Bracket:
780*440*235/8pcs

D-160H

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-160HLED40-24 A2	40W	24	T2A/T3A/T4A/T3M/T4	620*500*155	10.0	560	1176
D-160HLED60-24 A2	60W	24	T2A/T3A/T4A/T3M/T4	620*500*155	10.0	560	1176
D-160HLED75-36 A2	75W	36	T2A/T3A/T4A/T3M/T4	620*500*155	10.2	560	1176
D-160HLED100-36 A2	100W	36	T2A/T3A/T4A/T3M/T4	620*500*155	10.2	560	1176

LED chips - 3030

D-160HLED40-56 B4	40W	56	T2B/T3B/T4B	620*500*155	10.0	560	1176
D-160HLED60-84 B2	60W	84	T2B/T3B/T4B	620*500*155	10.0	560	1176
D-160HLED75-84 B2	75W	84	T2B/T3B/T4B	620*500*155	10.0	560	1176
D-160HLED100-126 B2	100W	126	T2B/T3B/T4B	620*500*155	10.2	560	1176





— King-Bridge Lighting —



宁波金羽桥照明科技有限公司

NING KING-BRIDGE LIGHTING TECHNOLOGY CO.,LTD.

地址：浙江省余姚市阳明街道新桥工业区

Add: Xinqiao Industry Zone, Yangming Street, Yuyao City, Zhejiang Province, China

Tel: +86-574-6256 6890

Fax: +86-574-6256 6827

info@kled.com

国内营销中心：金羽桥照明科技（上海）有限公司

地址：上海市长宁区中山西路179号4K室

电话：189 1897 7928