




The photograph may not match the reference exactly. Please read the product description to identify the finish.

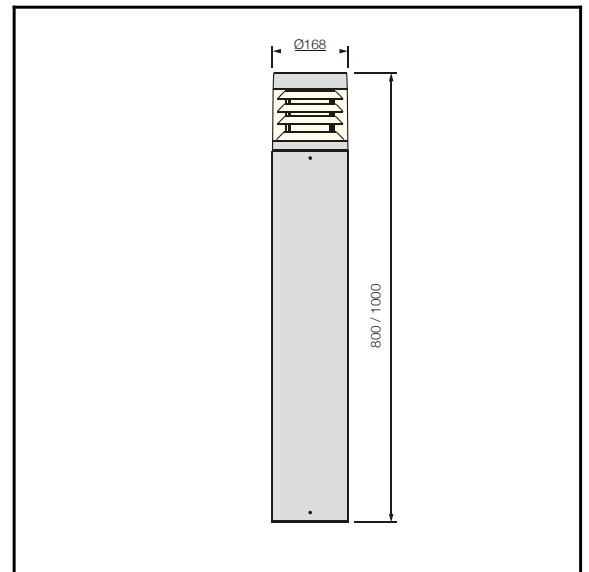

C-14FG

TECHNICAL CHARACTERISTICS



Product Model:	C-14FGH100
IP Protection degrees:	IP65
IK Protection degrees:	IK08
Light source:	144 x SMD 2835
Total power consumption:	25W
Luminous Flux:	750-875Lm
Luminous efficiency:	30-35Lm/w
Color temperature:	4000K as standard. Optinal 2700K,3000K & 5700K. Amber
Voltage/Frequency:	100-240V/50-60Hz
Warranty(Years):	3
Units per box:	1
Net Weight(Kg)	5.8

MATERIALS / FINISHES

Structure material: High purity aluminium	aiffuser material: PC
Structure finish: Black	Diffuser finish: Transparent

GEAR



Multi-voltage electronic gear included (110-240 V / 50-60 Hz)

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

Kled reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product.
Please consult the sales team to clarify any doubt.

Tel.: +86 574 62566 890
Email: info@kled.com.cn
http://www.kled.com.cn/



$\phi 168$




Transparent PC

High purity aluminum

800/1000



$\phi 119$



Installation template

C-14FG