




## C-190 Series



### 简述 Description




- 铝压铸盖帽, 铝合金拉伸灯体, 可根据需要截取不同高度
  - 高透明PC扩散罩, 能有效防止发黄老化
  - 灯具采用间接投射发光模式, 具有很好的视觉舒适性
  - 高性能LED芯片, 驱动有0-10V / DALI / 编程电源选择
  - 防紫外线聚氨酯喷粉喷涂表面, 耐腐蚀可达1000小时以上
  - 灯具表面最高温度不超过50度, 安全可靠
- Aluminum die casting cover, extruded aluminum body, it can be cut different height.
  - High transparent PC diffuser, it can effectively prevent yellowing and aging.
  - Indirect light luminaire for use with led, which has high visual comfortable.
  - High quality LED chips, Driver with 0-10V/DALI/programmed options.
  - Surface anti-ultraviolet pure polyester powder painting.
  - The maximum surface temperature of all accessible part under 50 degrees.

其他功能选项: 移动感应功能 / 双色温切换功能

Other Options: Move sensor options / Colour temperature options

### 配光曲线 Photometric Data

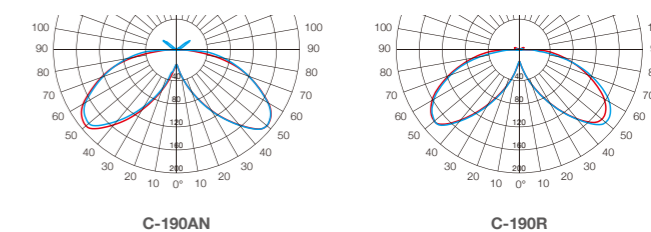

**C-190N**  
12W

**C-190R**  
12W

### 技术参数 Technology data

Code	Power	LED Qty	Input Voltage	Packing Size	Weight
LED chips - 5050					
C-190NLED12-6H60	12W	6	100V-240V	630*235*240	3.3
C-190NLED12-6H80	12W	6	100V-240V	830*235*240	3.7
C-190NLED12-6H100	12W	6	100V-240V	1030*235*240	4.1
LED chips - 5050					
C-190RLED12-5H60	12W	5	100V-240V	630*235*240	3.3
C-190RLED12-5H80	12W	5	100V-240V	830*235*240	3.7
C-190RLED12-5H100	12W	5	100V-240V	1030*235*240	4.1

### 可选配件 Accessories options

	Code
装饰盖 Decorative Cover	220001875
Q-02H防水连接器 Terminal Box	320000698
基础预埋件 Anchor Bolts	250000377
膨胀螺钉 Expansion Bolts	613040003
基础锚 Anchor	250000272

### 延伸产品 More in family



**B-190R**

Wall Lighting: 12W.  
Page. 422

