





简述 Description



- 铝压铸灯体外壳，铝合金拉伸灯杆，高度根据客户需要截取
- 模组式光源模块配超白钢化玻璃，灯具模组角度可调
- 防紫外线聚氨酯塑粉喷涂表面，耐腐蚀可以达1000小时以上
- 灯具表面最高温度不超过50度，安全可靠
- 所有外部螺钉均为304不锈钢材质，底座埋件额外可选配

- Aluminum die casting cover, extruded aluminum body, it can be cut different height.
- LED module design and with supper tempered galss, and the module angle can adjustable.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- The maximum surface temperature of all accessible part under 50 degrees for safety and reliable.
- All external screws are made of 304 stainless steel, Additional optional base embedded parts.

配光曲线 Photometric Data

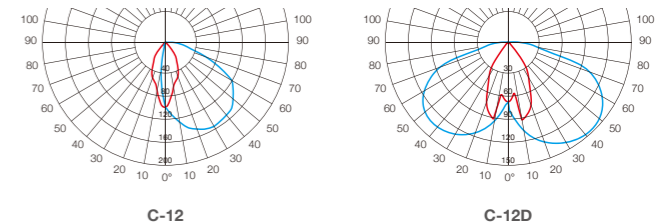

C-12
12W

C-12D
18W

技术参数 Technology data

Code	Power	LED Qty	Input Voltage	Packing Size	Weight
LED chips - 3030					
C-12LED12-10H80	12W	10	100V-240V	835*215*170	2.4
C-12LED12-10H100	12W	10	100V-240V	1035*215*170	2.6
LED chips - 3030					
C-12DLED18-20H80	18W	20	100V-240V	835*310*170	3.0
C-12DLED18-20H100	18W	20	100V-240V	1035*310*170	3.2

可选配件 Accessories options

	Code
防水接线盒 Terminal Box	230000232
基础预埋件 Anchor Bolts	250000377
膨胀螺钉 Expansion Bolts	613040003

延伸产品 More in family



B-12

Wall Lighting: 12W.
Page. 404

B-12D

Wall Lighting: 18W.
Page. 404

