



TG-12 Series



TG-12S
9W



TG-12M
25W

简述 Description



- 铝压铸灯体外壳，超白钢化玻璃，特殊外形设计，有2种尺寸供选择
- 高透光PC透镜，具有高视觉舒适性和均匀配光透镜，供多种不同配光选择
- 高性能LED芯片，有ON-OFF / DALI / DMX / RGBW多种控制程序选项
- 防紫外线聚氨酯塑粉喷涂表面，耐腐蚀可以达到1000小时以上
- 无生物蓝光危害风险，符号EN62471: 2008标准
- 所有外部螺钉均为304不锈钢材质


- Die-casting aluminium body, super white tempered glass. Special shape design, it has 2 sizes version options.
- Optics with PC lens with high visual comfortable and good anti glare effect, multiple light distribution options.
- High quality LED chips, with ON-OFF/DALI/ DMX/RGBW programmed options.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, in accordance with EN 62471:2008.
- All external screws are made of 304 stainless steel.

功率: 9W-25W
光效: 110-135 Lm/W
色温: 3000K / 4000K / 5000K / 5700K
显色指数: >80Ra / 90Ra
功能选项: ON-OFF / DALI / DMX / RGBW

Power: 9W-25W
Nominal efficacy: 110-135 Lm/W
CCT: 3000K / 4000K / 5000K / 5700K
CRI: >80Ra / 90Ra
Options: ON-OFF / DALI / DMX / RGBW

- **应用场合:** 建筑物、雕塑、标志物、广告牌等景观照明场所
- **Applications:** For landscape lighting places such as buildings, sculptures, signs and billboards.

发光角度 Optics

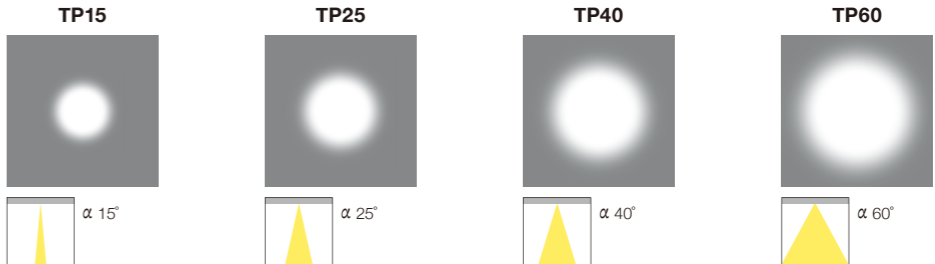




技术参数 Technology data




TG-12M

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535 TG-12MLED25-9	25W	9	TP15/TP25/TP40/TP60	385*335*228/4pcs	10.6	3600	7380
LED chips - RGBW TG-12MLED25-9RGBW	25W	9	TP15/TP25/TP40/TP60	385*335*228/4pcs	10.6	3600	7380



TG-12S

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535 TG-12SLED9-3	9W	3	TP15/TP25/TP40/TP60	295*265*205/4pcs	5.2	6480	13600
LED chips - RGBW TG-12SLED9-3RGBW	9W	3	TP15/TP25/TP40/TP60	295*265*205/4pcs	5.2	6480	13600



可选配件 Accessories options

	Code
地插 Spike	230000103
基础埋件 Anchor Bolts	250000375
膨胀螺钉 Expansion Bolts	613040004